


WAAS CH 72914 W01A	APP CRS 008°	Rwy Ldg 3700 TDZE 1774 Apt Elev 1774
--	------------------------	---

RNAV (GPS) RWY 1
ANTELOPE COUNTY (4V9)

RNP APCH - GPS. Baro-VNAV and VDP NA when using BVN altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. Circling to Rwy 13, 31 NA at night. When local altimeter setting not received, use BVN altimeter setting and increase LPV DA to 2032 feet; increase LNAV/VNAV DA to 2227 feet and all visibilities ¼ SM. Increase all MDAs 60 feet.	MISSED APPROACH: Climb to 4400 direct MODPY and hold, continue climb-in-hold to 4400.
---	---

AWOS-3PT 119.275	MINNEAPOLIS CENTER 128.0 257.95	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

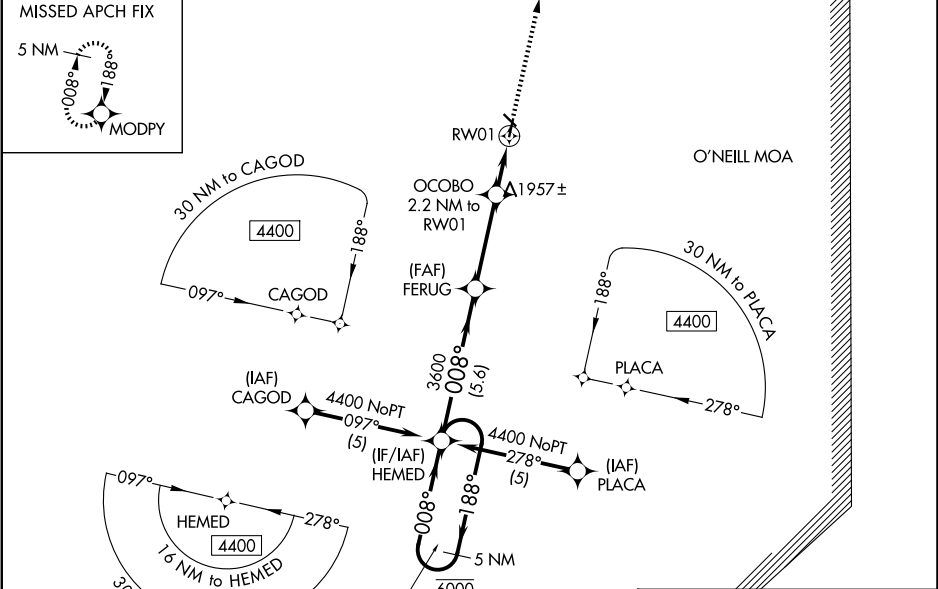

ELEV 1774 D TDZE 1774	
MIRL Rwys 1-19 and 13-31 0	

5 NM Holding Pattern		HEMED		FERUG		OCOBO		4400		MODPY			
6000 ← 188°		4400 → 008°		008°		3600		2.2 NM to RW01		↑		✴	
GP 3.00°		TCH 41		3600		2500		1.3 NM to RW01		RW01			
		5.6 NM		3.5 NM		0.9		1.3 NM					
CATEGORY	A	B	C	D									
LPV DA	1974-¾	200 (200-¾)	NA										
LNAV/VNAV DA	2169-1⅛	395 (400-1⅛)	NA										
LNAV MDA	2220-1	446 (500-1)	NA										
CIRCLING	2260-1 486 (500-1)	2380-1 606 (700-1)	NA										