

RNP APCH.


▼

NA

Rwy 5 helicopter visibility reduction below ¼ SM NA. When local altimeter setting not received, use Owensboro altimeter setting and increase all MDAs 60 feet; increase LP and LNAV Cat C visibility ⅛ SM and Circling Cat C visibility ¼ SM.

MISSED APPROACH:
Climb to 3000 direct MCKVR and hold.

AWOS-3 119.775	EVANSVILLE APP CON ★ 124.025 290.9	UNICOM 123.0 (CTAF) 0
-------------------	---------------------------------------	--------------------------

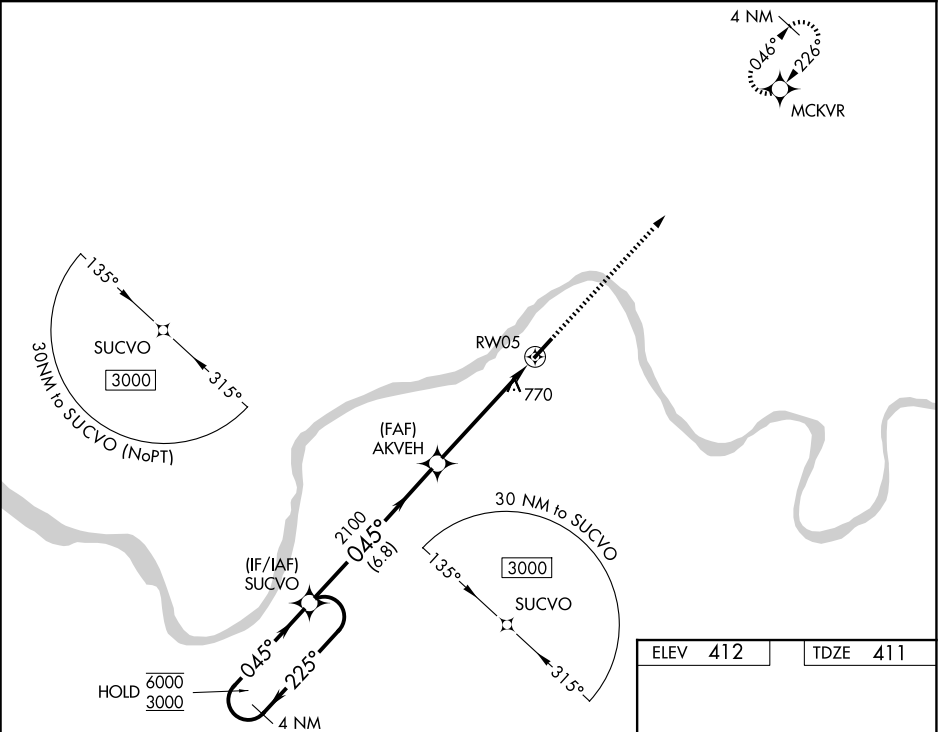

4 NM
Holding Pattern

Visual Segment - Obstacles.

3000 MCKVR

6000
3000

225°
045°

045°

2100

6.8 NM

5.2 NM

RW05

CATEGORY	A	B	C	D
LP MDA	1020-1	609 (700-1)	1020-1¾ 609 (700-1¾)	NA
LNAV MDA	1020-1	609 (700-1)	1020-1¾ 609 (700-1¾)	NA
CIRCLING	1020-1 608 (700-1)	1080-1 668 (700-1)	1080-1¾ 668 (700-1¾)	NA

ELEV 412

TDZE 411

5002 X 75

045°

MIRL Rwy 5-23 0

REIL Rws 5 and 23 0