

WAAS
CH **77842**
W28A

APP CRS
281°

Rwy Ldg
TDZE **732**
Apt Elev **732**

RNAV (GPS) RWY 28

BRECKINRIDGE COUNTY (I93)

RNP APCH.


▼

NA

Baro-VNAV NA. Use Fort Knox altimeter setting, when not received, use Elizabethtown altimeter setting and increase LPV DA to 1047, LNAV/VNAV DA to 1185 and all MDA 20 feet.

MISSED APPROACH: Climb to 4000 direct RICKZ and hold, continue climb-in-hold to 4000.

AWOS-3PT 123.625	KFTK ATIS ★ 109.6	LOUISVILLE APP CON 123.675 327.0	CTAF 122.9 0
----------------------------	-----------------------------	--	------------------------

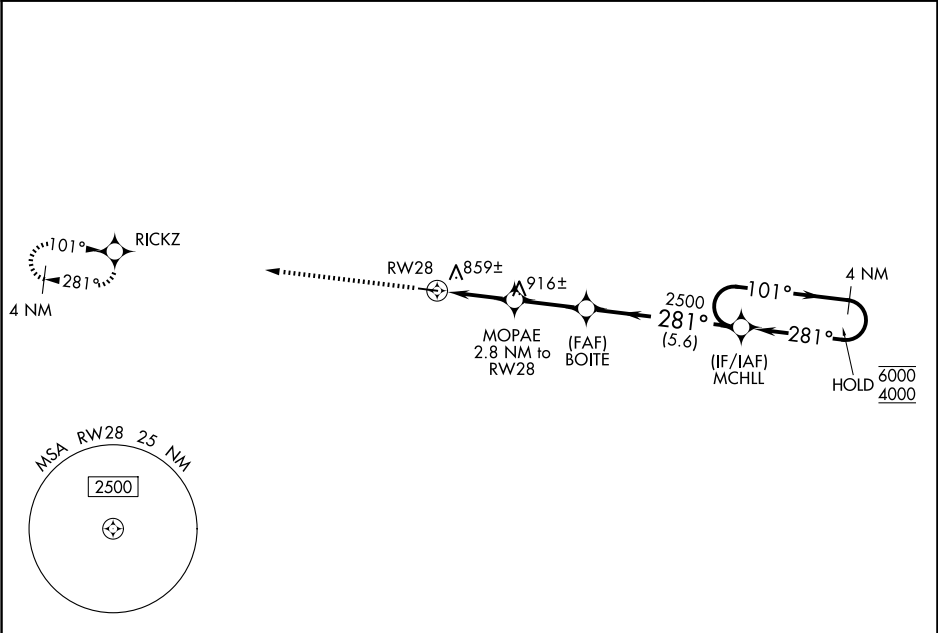

ELEV 732	TDZE 732				
		4000	RICKZ	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 27).	
		*LNAV only.	BOITE	2500	4 NM Holding Pattern
		MOPAE 2.8 NM to RWY28	2500	281°	101° → 6000 ← 281° 4000
		2.8 NM	2.6 NM	5.6 NM	GP 3.00° TCH 50
		281°			
CATEGORY	A	B	C	D	
LPV DA	1040-1		308 (400-1)		
LNAV/VNAV DA	1178-1 ³ / ₈		446 (500-1 ³ / ₈)		
LNAV MDA	1180-1	448 (500-1)	1180-1 ³ / ₈	448 (500-1 ³ / ₈)	
CIRCLING	1380-1 648 (700-1)	1480-1 748 (800-1)	1480-2 ¹ / ₄ 748 (800-2 ¹ / ₄)	1480-2 ¹ / ₂ 748 (800-2 ¹ / ₂)	