


|                                                 |                        |                                                                 |
|-------------------------------------------------|------------------------|-----------------------------------------------------------------|
| LOC/DME I-XWA<br><b>109.1</b><br>Chan <b>28</b> | APP CRS<br><b>320°</b> | Rwy ldg <b>7503</b><br>TDZE <b>2350</b><br>Apt Elev <b>2353</b> |
|-------------------------------------------------|------------------------|-----------------------------------------------------------------|

ILS or LOC RWY 32  
WILLISTON BASIN INTL (XWA)

|                                                                                 |           |                                                                                                                             |
|---------------------------------------------------------------------------------|-----------|-----------------------------------------------------------------------------------------------------------------------------|
| DME required.<br>NA For inop ALS, increase S-LOC 32 Cat C/D visibility to ¾ SM. | MALSR<br> | MISSED APPROACH: Climb to 3500 then climbing left turn to 4300 direct ISN VOR/DME and hold, continue climb-in-hold to 4300. |
|---------------------------------------------------------------------------------|-----------|-----------------------------------------------------------------------------------------------------------------------------|

|                        |                                              |                                 |
|------------------------|----------------------------------------------|---------------------------------|
| ASOS<br><b>125.925</b> | SALT LAKE CITY CENTER<br><b>126.85 305.2</b> | UNICOM<br><b>122.8 (CTAF) 1</b> |
|------------------------|----------------------------------------------|---------------------------------|

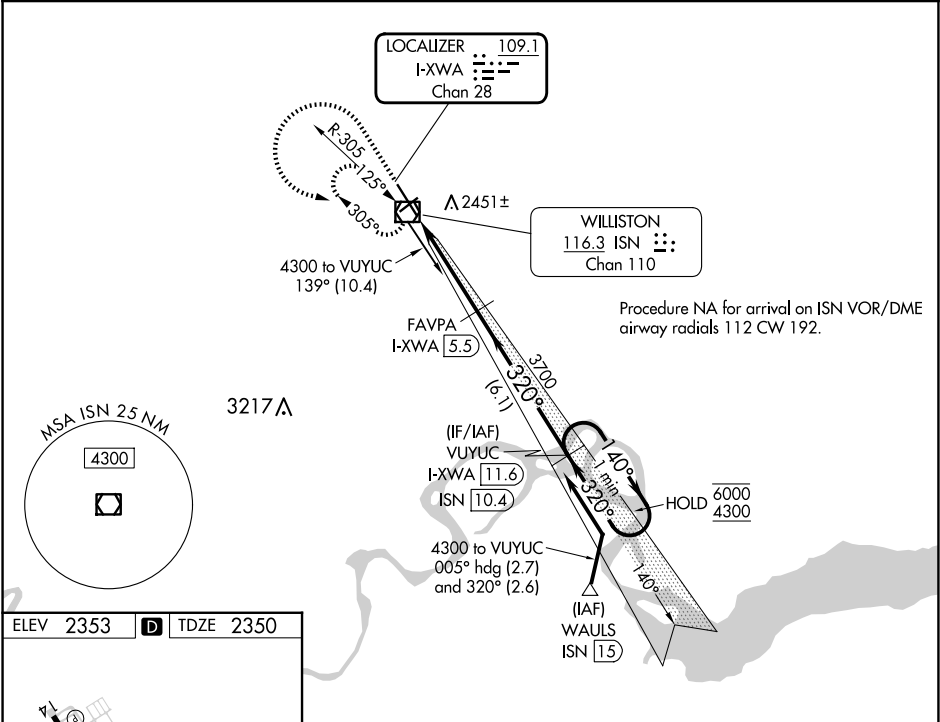

|           |                       |                       |                         |                       |                            |
|-----------|-----------------------|-----------------------|-------------------------|-----------------------|----------------------------|
| 3500      | 4300                  | ISN                   | FAVPA I-XWA 5.5         | VUYUC I-XWA 11.6      | One Minute Holding Pattern |
| *LOC only | *I-XWA 2.2            | 3700                  | 3700                    | 140° 6000             | 320° 4300                  |
| 0.8 NM    | 3.3 NM                | 6.1 NM                |                         | GS 3.00°              | TCH 50                     |
| CATEGORY  | A                     | B                     | C                       | D                     |                            |
| S-ILS 32  | 2550-½                | 200 (200-½)           |                         |                       |                            |
| S-LOC 32  | 2660-½                | 310 (400-½)           |                         |                       |                            |
| CIRCLING  | 2760-1<br>407 (500-1) | 2820-1<br>467 (500-1) | 2820-1½<br>467 (500-1½) | 2920-2<br>567 (600-2) |                            |