

LOC/DME I-BTR	APP CRS	Rwy Ldg
110.3	133°	5720
Chan 40		TDZE 67
		Apt Elev 70



ILS or LOC RWY 13
BATON ROUGE METRO, RYAN FLD (BTR)

T For inop MALSR when using Hammond altimeter setting, increase S-ILS 13 all Cats visibility to ¾ mile, and S-LOC 13 visibility to 1¾ mile. VDP NA with Hammond altimeter setting. When local altimeter setting not received, use Hammond altimeter setting and increase all DA 91 feet and all MDA 100 feet, increase S-LOC 13 Cats C and D visibility ¼ mile, increase Circling Cats C and D visibility ¼ mile. For inop MALSR, increase S-LOC 13 Cats C and D to 1¾ mile.



MISSED APPROACH:
Climb to 700 then climbing right turn to 2000 direct LSU VORTAC and hold.

ATIS 125.2	BATON ROUGE APP CON ★ 120.3 278.3	RYAN TOWER ★ 118.45 (CTAF) 257.8	GND CON 121.9	CLNC DEL 119.4	UNICOM 122.95
----------------------	---	--	-------------------------	--------------------------	-------------------------

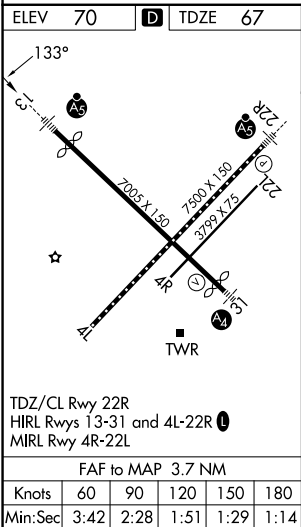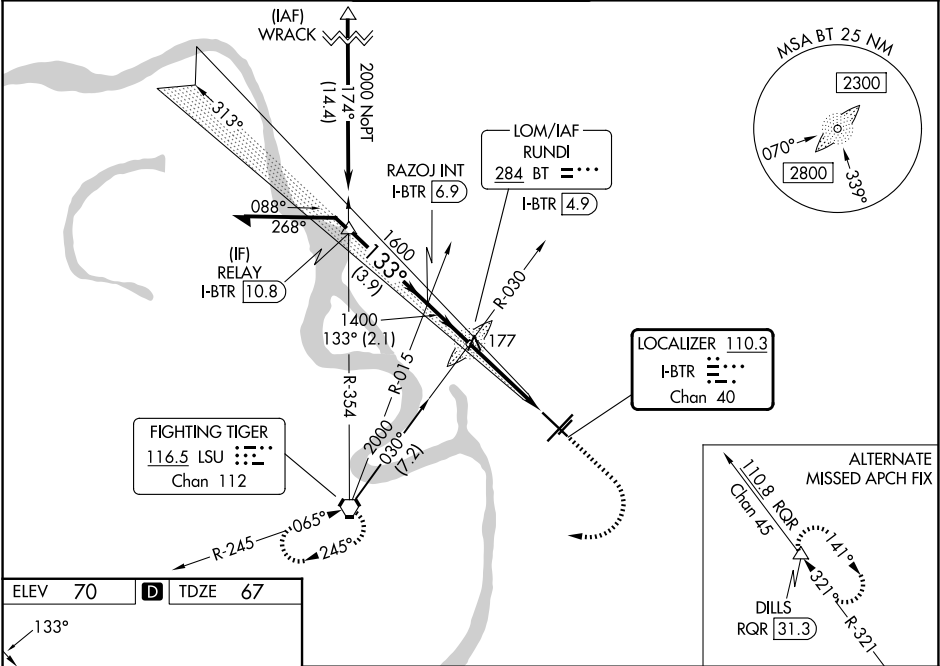

RUNDI LOM/INT I-BTR 4.9				
Remain within 10 NM				
313°				
2000				
RAZOJ INT I-BTR 6.9				
1600				
133°				
1400				
GS 3.00° TCH 57				
2.1 NM 2.7 NM 1 NM				
CATEGORY	A	B	C	D
S-ILS 13	267-½ 200 (200-½)			
S-LOC 13	480-½	413 (500-½)	480-¾	413 (500-¾)
CIRCLING	560-1 490 (500-1)	660-1 590 (600-1)	780-2 710 (800-2)	840-2½ 770 (800-2½)