

|                                        |                        |                                                             |
|----------------------------------------|------------------------|-------------------------------------------------------------|
| WAAS<br>CH <b>72817</b><br><b>W13A</b> | APP CRS<br><b>133°</b> | Rwy Ldg <b>5720</b><br>TDZE <b>67</b><br>Apt Elev <b>70</b> |
|----------------------------------------|------------------------|-------------------------------------------------------------|

RNAV (GPS) RWY 13

BATON ROUGE METRO, RYAN FLD (BTR)

▼


▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C (23°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Hammond altimeter setting and increase all DA 91 feet and all MDA 100 feet, and increase LNAV/VNAV all Cats visibility ¼ mile, and LNAV Cats C and D visibility ⅓ mile. For inop MALS when using Hammond altimeter setting, increase LPV all Cats visibility to ⅓ mile, LNAV Cat C and D visibility to 1⅓ mile. Baro-VNAV and VDP NA when using Hammond altimeter setting.

MALS

MISSED APPROACH: Climb to 2300 direct FADAD and hold.

|                      |                                             |                                              |                         |                          |                         |
|----------------------|---------------------------------------------|----------------------------------------------|-------------------------|--------------------------|-------------------------|
| ATIS<br><b>125.2</b> | BATON ROUGE APP CON ★<br><b>120.3 278.3</b> | RYAN TOWER ★<br><b>118.45 (CTAF) 0 257.8</b> | GND CON<br><b>121.9</b> | CLNC DEL<br><b>119.4</b> | UNICOM<br><b>122.95</b> |
|----------------------|---------------------------------------------|----------------------------------------------|-------------------------|--------------------------|-------------------------|

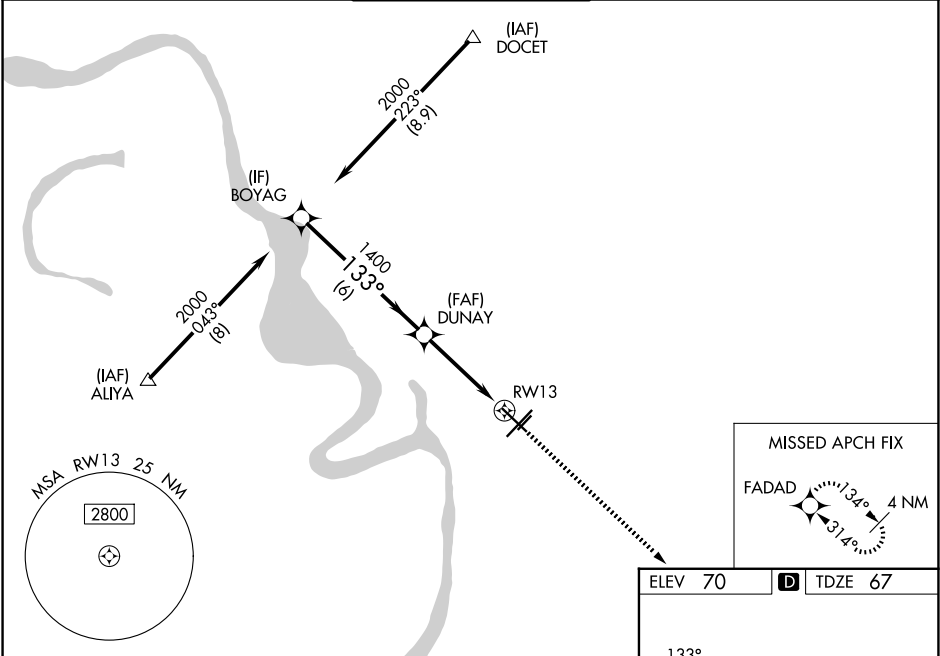

BOYAG

DUNAY

RWY 13

GP 3.00°  
TCH 57

2000

1400

2300

FADAD

\*1.3 NM to RWY 13

\*LNAV only.

6 NM

2.7 NM

1.3

| CATEGORY     | A                    | B                    | C                    | D                      |
|--------------|----------------------|----------------------|----------------------|------------------------|
| LPV DA       |                      | 267-1½               | 200 (200-½)          |                        |
| LNAV/VNAV DA |                      | 465-⅞                | 398 (400-⅞)          |                        |
| LNAV MDA     | 540-1½               | 473 (500-½)          | 540-1                | 473 (500-1)            |
| CIRCLING     | 560-1<br>490 (500-1) | 660-1<br>590 (600-1) | 780-2<br>710 (800-2) | 840-2½<br>770 (800-2½) |

ELEV 70

D

TDZE 67

133°

22R

22L

7500 X 150

399 X 75

4R

4L

TWR

TDZ/CL Rwy 22R  
HIRL Rwy 13-31 and 4L-22R  
MIRL Rwy 4R-22L

SC-4, 27 NOV 2025 to 25 DEC 2025

SC-4, 27 NOV 2025 to 25 DEC 2025