

VORTAC LSU
116.5
Chan **112**

APP CRS
066°

Rwy Ldg **7500**
TDZE **69**
Apt Elev **70**


VOR RWY 4L

BATON ROUGE METRO, RYAN FLD (BTR)

Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Hammond altimeter setting and increase all MDA 100 feet, increase S-4L Cat A and Circling Cat A and Cat C visibility ¼ mile and Circling Cat D visibility ½ mile, PAYIN Fix Minimums: increase S-4L Cats C/D and Circling Cats C/D visibility ¼ mile. VDP NA when using Hammond altimeter setting.

MISSED APPROACH: Climb to 2500 on LSU VORTAC R-060 to AROLL INT/LSU 24.3 DME and hold.

ATIS 125.2	BATON ROUGE APP CON ★ 120.3 278.3	RYAN TOWER ★ 118.45 (CTAF) 257.8	GND CON 121.9	CLNC DEL 119.4	UNICOM 122.95
----------------------	---	--	-------------------------	--------------------------	-------------------------

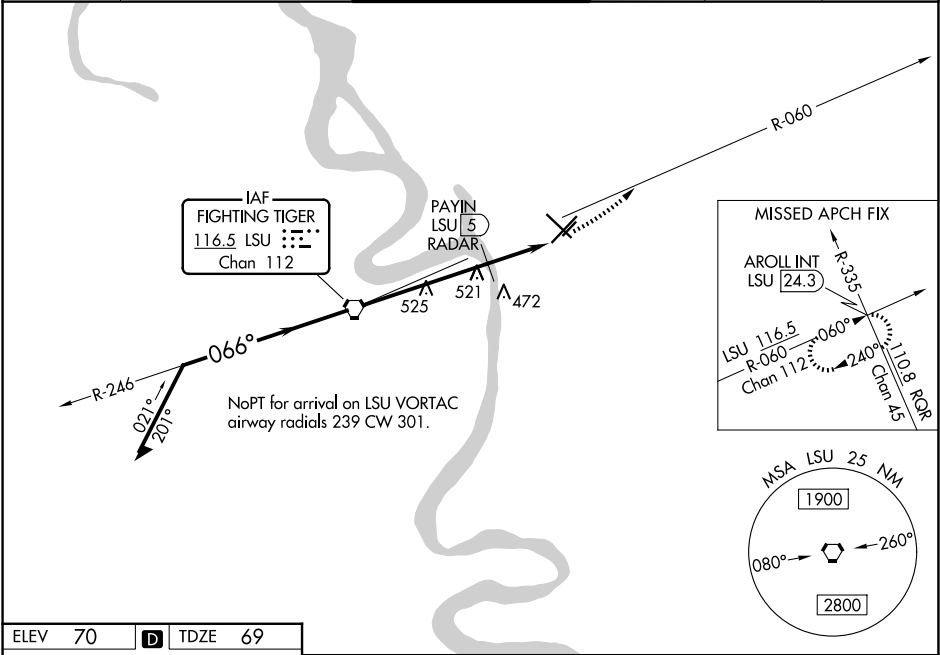

ELEV 70 TDZE 69

TDZ/CL Rwy 22R
HIRL Rwy 13-31 and 4L-22R
MIRL Rwy 4R-22L

FAF to MAP 7.5 NM

Knots	60	90	120	150	180
Min:Sec	7:30	5:00	3:45	3:00	2:30

Remain within 10 NM

LSU VORTAC

2500

246°

066°

2500

3.00° TCH 55

PAYIN LSU 5 RADAR

LSU 5.8

LSU 7.5

2500

AROLL INT

LSU R-060

*960 when using Hammond altimeter setting.

5 NM

0.8

1.6

CATEGORY	A	B	C	D
S-4L	860-1 791 (800-1)	860-1¼ 791 (800-1¼)	860-2½	791 (800-2½)
CIRCLING	860-1 790 (800-1)	860-1¼ 790 (800-1¼)	860-2½	790 (800-2½)

PAYIN FIX MINIMUMS

S-4L	640-1	571 (600-1)	640-1½	571 (600-1½)
CIRCLING	640-1 570 (600-1)	660-1 590 (600-1)	780-2 710 (800-2)	840-2½ 770 (800-2½)