


|          |         |          |       |
|----------|---------|----------|-------|
| LOC I-WA | APP CRS | Rwy Ldg  | 10201 |
| 110.15   | 303°    | TDZE     | 1380  |
|          |         | Apt Elev | 1384  |

ILS or LOC RWY 30C  
MESA GATEWAY (IWA)

When local altimeter setting not received, use Phoenix Sky Harbor Intl altimeter setting and increase S-ILS DA to 1660 feet and all MDA 80 feet, increase S-ILS 30C, S-LOC 30C all Cats and Circling Cats C/D/E visibility ¼ SM.

MISSED APPROACH: Climb to 2800 then climbing right turn to 5000 via heading 145° and IWA VORTAC R-015 to IWA VORTAC and hold, continue climb-in-hold to 5000 (TACAN aircraft continue via IWA VORTAC R-122 to HALLB/9.9 DME and hold, continue climb-in-hold to 5000, hold SE, LT, 302° inbound).

|                       |                                |                                      |                         |
|-----------------------|--------------------------------|--------------------------------------|-------------------------|
| ATIS<br>133.5 270.275 | PHOENIX APP CON<br>124.9 353.8 | GATEWAY TOWER*<br>120.6 (CTAF) 289.4 | GND CON<br>128.25 275.8 |
|-----------------------|--------------------------------|--------------------------------------|-------------------------|

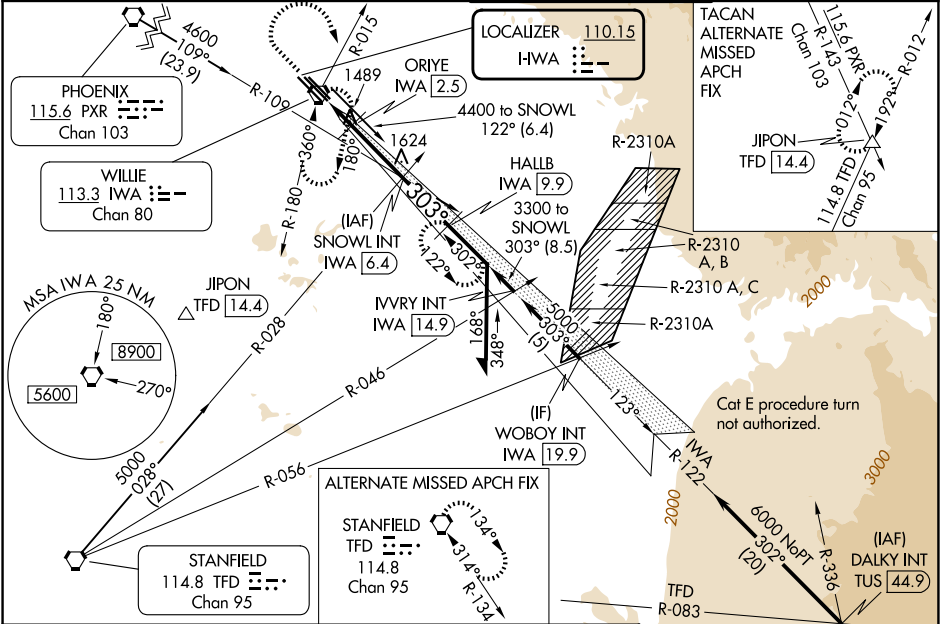

|                                                                 |        |             |              |              |              |
|-----------------------------------------------------------------|--------|-------------|--------------|--------------|--------------|
| 2800                                                            | 5000   | IWA         | IWA          | SNOWL INT    | Remain       |
| ↑                                                               | hdg    | R-015       |              | IWA [6.4]    | within 10 NM |
|                                                                 | 145°   |             |              |              |              |
| VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 49). |        |             |              |              |              |
|                                                                 | IWA    | ORIE        |              |              |              |
|                                                                 | 0.6    | IWA [2.5]   |              |              |              |
| GS 3.00°                                                        |        |             |              |              |              |
| TCH 41                                                          |        |             |              |              |              |
|                                                                 | 1.9 NM | 3.9 NM      |              |              |              |
| CATEGORY                                                        | A      | B           | C            | D            | E            |
| S-ILS 30C                                                       |        | 1580-¾      | 200 (200-¾)  |              |              |
| S-LOC 30C                                                       | 1940-1 | 560 (600-1) | 1940-1½      | 1940-1¾      | 1940-2       |
|                                                                 |        |             | 560 (600-1½) | 560 (600-1¾) | 560 (600-2)  |
| CIRCLING                                                        | 1940-1 | 556 (600-1) | 1940-1½      | 2000-2       | 2020-2¼      |
|                                                                 |        |             | 556 (600-1½) | 616 (700-2)  | 636 (700-2¼) |
| ORIE FIX MINIMUMS                                               |        |             |              |              |              |
| S-LOC 30C                                                       | 1800-1 | 420 (500-1) | 1800-1¼      | 420 (500-1¼) | 1800-1½      |
|                                                                 |        |             |              |              | 420 (500-1½) |
| CIRCLING                                                        | 1880-1 | 496 (500-1) | 1880-1½      | 2000-2       | 2020-2¼      |
|                                                                 |        |             | 496 (500-1½) | 616 (700-2)  | 636 (700-2¼) |

