


WAAS CH 50325 W12B	APP CRS 123°	Rwy Ldg 10401 TDZE 1349 Apt Elev 1384
--	------------------------	--

RNAV (GPS) RWY 12R

T DME/DME RNP-0.3 NA. VDP NA with Phoenix Sky Harbor Intl
A altimeter setting. When local altimeter setting not received, use
Phoenix Sky Harbor Intl altimeter setting and increase all MDA 80
feet; increase LP and LNAV Cats C/D and Circling Cat D visibility $\frac{1}{4}$ SM.

MISSED APPROACH: Climb to 1800 then climbing right turn to 4300 direct GEJRI and hold. continue climb-in-hold to 4300.

ATIS 133.5 270.275	PHOENIX APP CON 124.9 353.8	GATEWAY TOWER ★ 120.6 (CTAF) 289.4	GND CON 128.25 275.8
-----------------------	--------------------------------	---------------------------------------	-------------------------

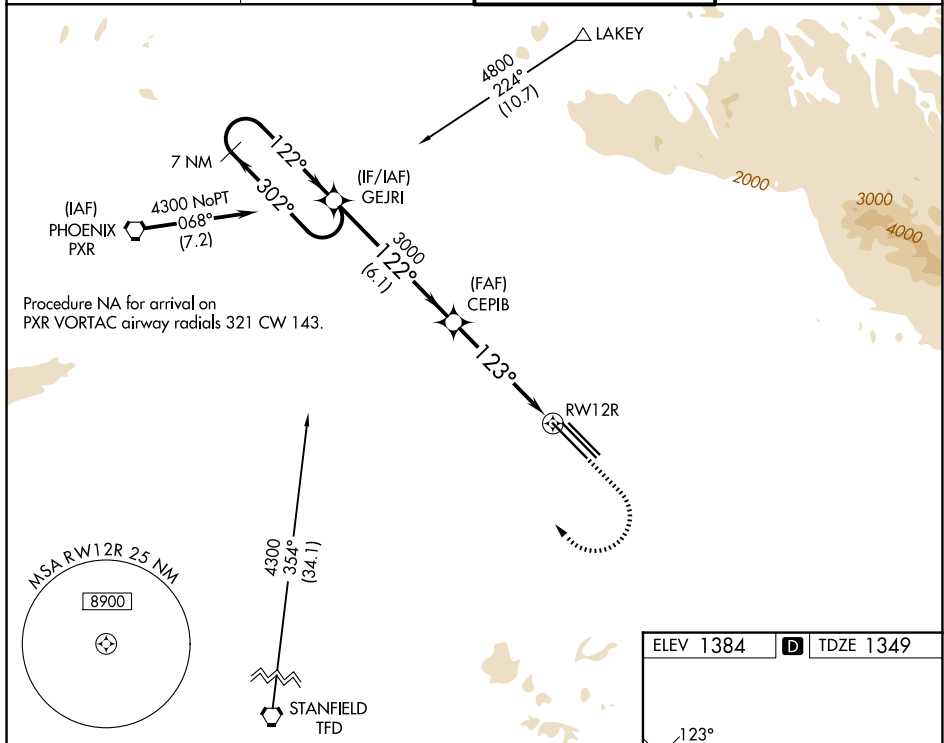

VGSI and RNAV descent angles not coincident (VGSI Angle 3.00/TCH 60).

7 NM Holding Pattern

GEJRI

CEPIB

4300 ← 302°

122° →

1.22°

3000

3.00° TCH 45

1.23°

1.1 NM to RWY 12R

RWY 12R

6.1 NM

4 NM

1.1 NM

CATEGORY	A	B	C	D	E
LP MDA	1740-1 391 (400-1)		1740-1½ 391 (400-1½)		2300-3 951 (1000-3)
LNAV MDA	1740-1 391 (400-1)		1740-1½ 391 (400-1½)		2420-3 1071 (1100-3)
CIRCLING	1880-1 496 (500-1)		1880-1½ 496 (500-1½)	2000-2 616 (700-2)	2420-3 1036 (1100-3)

MIRL Rwy 12R-30L

HIRL Rwys 12L-30R and 12C-30C

REIL Rwys 12L and 30R