

WAAS CH 86701 W25A	APP CRS 246°	Rwy Ldg TDZE 478 Apt Elev 482
--	------------------------	---

RNAV (GPS) RWY 25

CINCINNATI MUNI/LUNKEN FLD (LUK)


RNP APCH - GPS.

▼

Baro-VNAV and VDP NA when using CVG altimeter setting. Rwy 25 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use CVG altimeter setting and increase LPV DA to 961 feet, all visibilities $\frac{1}{8}$ SM; increase LNAV/VNAV DA to 1248 feet; increase all MDAs 100 feet, LNAV Cat B visibility $\frac{1}{4}$ SM, and LNAV Cat C/D visibility $\frac{1}{2}$ SM.

MISSED APPROACH: Climb to 2500 direct JULVU and on track 173° to SHILA and on track 096° to CALIF and hold, continue climb-in-hold to 2600.

ATIS 123.6	CINCINNATI APP CON 121.0 254.25	LUNKEN TOWER ★ 118.7 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
----------------------	---	---	-------------------------	-------------------------

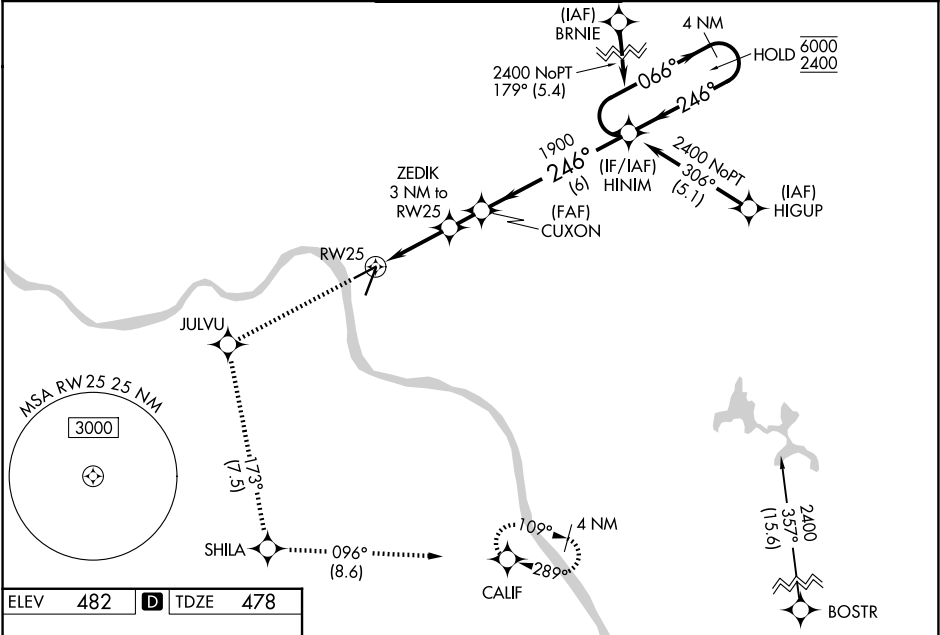

ELEV 482 D TDZE 478

Diagram showing the approach path from the TWR (Elev 482) to RW25. The path includes a 246° track, a 5127 x 100 ft segment, and a 6101 x 130 ft segment. The final approach segment is from HINIM to RW25 (246° track, 1900 ft).

2500	JULVU	tr 173°	SHILA	tr 096°	CALIF	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40).
						4 NM Holding Pattern
						GP 3.00° TCH 55
						2.2 NM 0.8 NM 1.3 NM 6 NM
CATEGORY	A		B		C	D
LPV DA	875-1¼		397 (400-1¼)			
LNAV/VNAV DA	1162-2½		684 (700-2½)			
LNAV MDA	1160-1 682 (700-1)		1160-2 682 (700-2)			

REIL Rwy 3
HIRL Rwy 3-21
MIRL Rwy 7-25

CINCINNATI, OHIO
Amdt 1D 12JUN25