

APP CRS	Rwy Ldg	9953
238°	TDZE	786
	Apt Elev	799

RNAV (RNP) Z RWY 24L
CLEVELAND-HOPKINS INTL (CLE)

RNP AR APCH.

T For uncompensated Baro-VNAV systems, procedure NA below -18°C (0°F) or above 54°C (130°F). For inop ALS, increase RNP 0.19 all Cats visibility to RVR 5500.

MALSR




MISSED APPROACH: Climb to 3000 direct HASLE and on track 177° to SAROW and hold.

D-ATIS
127.85


CLEVELAND APP CON
126.55 346.325

CLEVELAND TOWER
124.5 273.45

GND CON
121.7 273.45

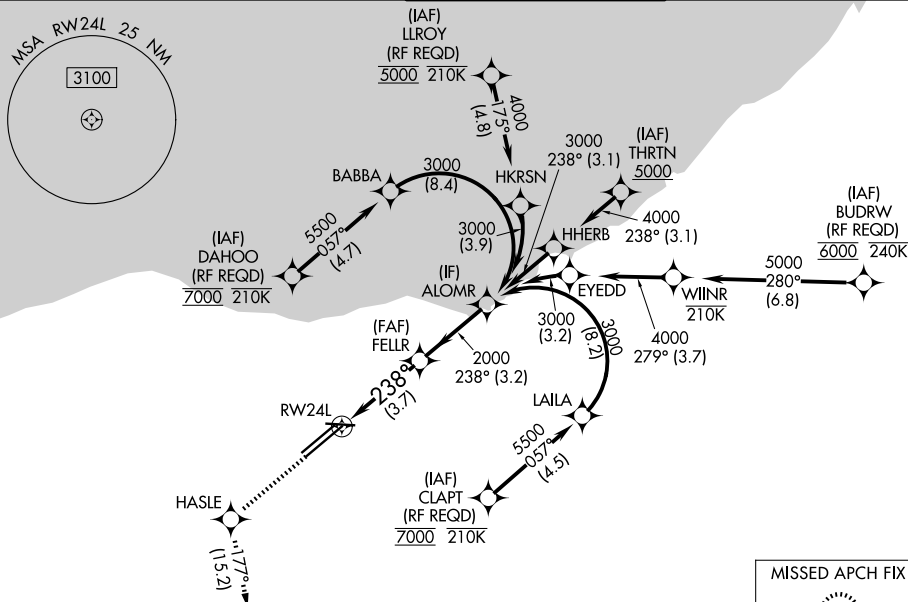

ELEV	799	D	TDZE	786
------	-----	----------	------	-----



REIL Rwy 10
TDZ/CL Rwy 6L, 6R, 24L and 24R
HIRL Rwys 6L-24R, 6R-24L and 10-28

CLEVELAND, OHIO
Orig 24MAY18


41°25'N-81°51'W

CLEVELAND-HOPKINS INTL (CLE)
RNAV (RNP) Z RWY 24L

EC-2, 27 NOV 2025 to 25 DEC 2025

EC-2, 27 NOV 2025 to 25 DEC 2025

3000	HASLE	tr	SAROW	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 48).
------	-------	----	-------	--

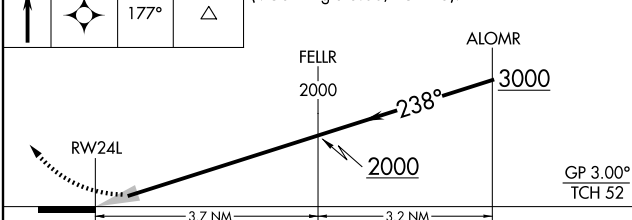

CATEGORY	A	B	C	D
RNP 0.19 DA	1140/30 354 (400-%)			
RNP 0.30 DA	1243/45 457 (500-%)			

AUTHORIZATION REQUIRED

CLEVELAND, OHIO
Orig 24MAY18

41°25'N-81°51'W

CLEVELAND-HOPKINS INTL (CLE)
RNAV (RNP) Z RWY 24L

EC-2, 27 NOV 2025 to 25 DEC 2025

EC-2, 27 NOV 2025 to 25 DEC 2025