

25275

RNAV (RNP) Z RWY 6L
CLEVELAND-HOPKINS INTL (CLE)

CLEVELAND-HOPKINS INTL (CLE

T For uncompensated Baro-VNAV systems, procedure NA below -18°C (0°F) or above 54°C (130°F). For inop ALS, increase RNP 0.17 all Cats visibility to RVR 5500 and RNP 0.30 all Cats visibility to RVR 6000.

MISSED APPROACH: Climb to 3000 direct ACAPO and on track 001° to PASLE and hold.

MSA RW06L 25 NM

3100

6000 238° (2.8)

(IF) JHUDY (RF REQD) 7000 210K

(IF) FRIND

5000 238° (3.3)

UVTHE

2300 058° (1.1)

2000 058° (1.1)

(FAF) BOEIE

DEVYL

2300 058° (1.9)

2900 058° (3.5)

2900 058° (3.7)

(IF) BETLL

4000 142° (3.3)

STEMR

DAYZD

WIPPN

(IF) TIANT

6000 238° (2.8)


(IAF) JAAIN (RF REQD) 7000 210K

ACAP0

MISSED APCH FIX


4 NM 235° 055° PASLE

not coincident 00/TCH 69).	3000	ACAPO	tr	PASLE
-------------------------------	------	-------	----	-------

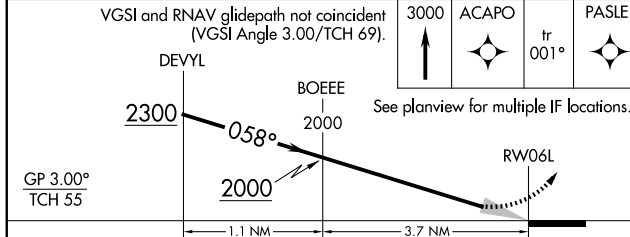

CATEGORY	A	B	C	D
RNP 0.17 DA		1123/30	350 (400- ⁵ / ₆)	
RNP 0.30 DA		1176/40	403 (400- ³ / ₄)	

AUTHORIZATION REQUIRED

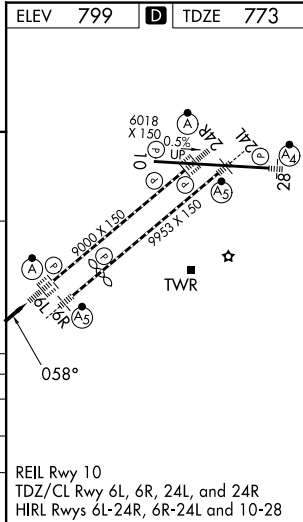

CLEVELAND-HOPKINS INTL (CLE)
RNAV (RNP) Z RWY 6L

EC-2, 27 NOV 2025 to 25 DEC 2025