


LOC/DME I-DAL	APP CRS	Rwy Ldg	7352
111.5	133°	TDZE	485
Chan 52		Apt Elev	487

ILS or LOC RWY 13L

DALLAS LOVE FLD (DAL)

RADAR required for procedure entry.	MALSR	MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 on heading 060° and CVE VOR/DME R-087 to SOLDLO INT/CVE 28.9 DME and hold.
Simultaneous approach authorized.		

D-ATIS	LONE STAR APP CON	LOVE TOWER	GND CON
120.15	124.3 282.275 (N) 125.2 343.65 (S)	123.7 239.3	121.75 348.6

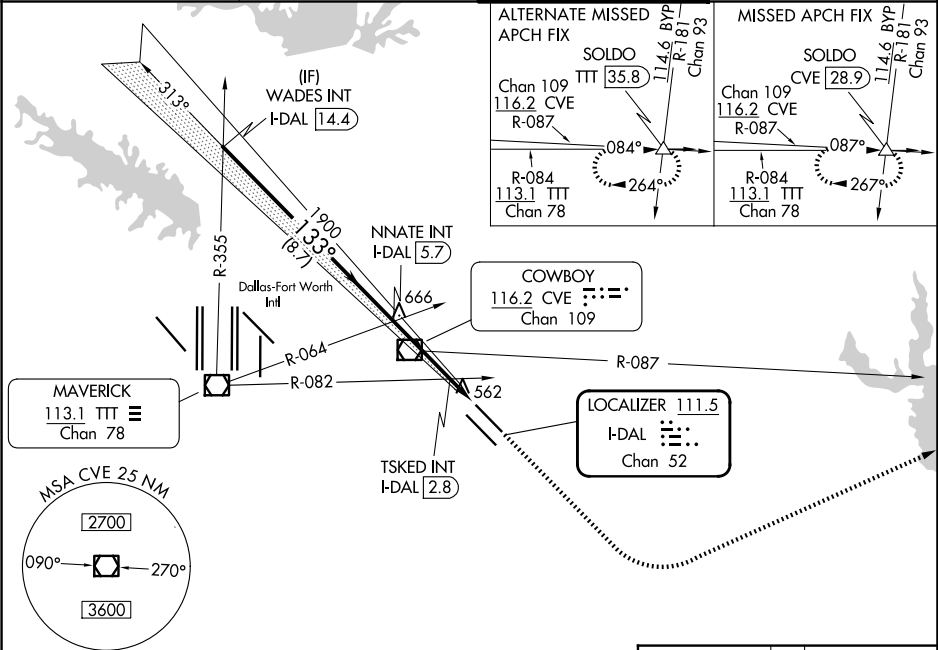

					ELEV 487	TDZE 485
CATEGORY	A	B	C	D		
S-ILS 13L	685/18 200 (200-½)					
S-LOC 13L	920/24	435 (500-½)	920/40	435 (500-¾)		
CIRCLING	1000-1 513 (600-1)	1140-1 653 (700-1)	1220-2 733 (800-2)	1520-3 1033 (1100-3)		
TSKED FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)						
S-LOC 13L	820/24	335 (400-½)	820/26	335 (400-½)		
CIRCLING	1000-1 513 (600-1)	1140-1 653 (700-1)	1220-2 733 (800-2)	1520-3 1033 (1100-3)		
TDZL/RCLS Rwy 13L and 31L HIRL Rwy 13L-31R, and 13R-31L						
FAF to MAP 4.3 NM						
Knots 60 90 120 150 180						
Min:Sec 4:18 2:52 2:09 1:43 1:26						