


WAAS CH 45600 W34A	APP CRS 344°	Rwy Ldg TDZE 368 Apt Elev 374
--	------------------------	---

RNAV (GPS) Y RWY 34L

MAHLON SWEET FLD (EUG)

RNP APCH.			ODALS 	MISSED APPROACH: Climb to 1500, then climbing left turn to 4000 direct VAUGN and hold.
	Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. For inop ALS increase LNAV/VNAV visibility Cats A-B to RVR 4500. Inop table does not apply to LPV minimums.			
ATIS 125.225	CASCADE APP CON★ 119.6 348.7	EUGENE TOWER★ 118.9 (CTAF) 0 371.9 (16R/34L) 124.15 371.9 (16L/34R)	GND CON 121.7 269.5	UNICOM 122.95

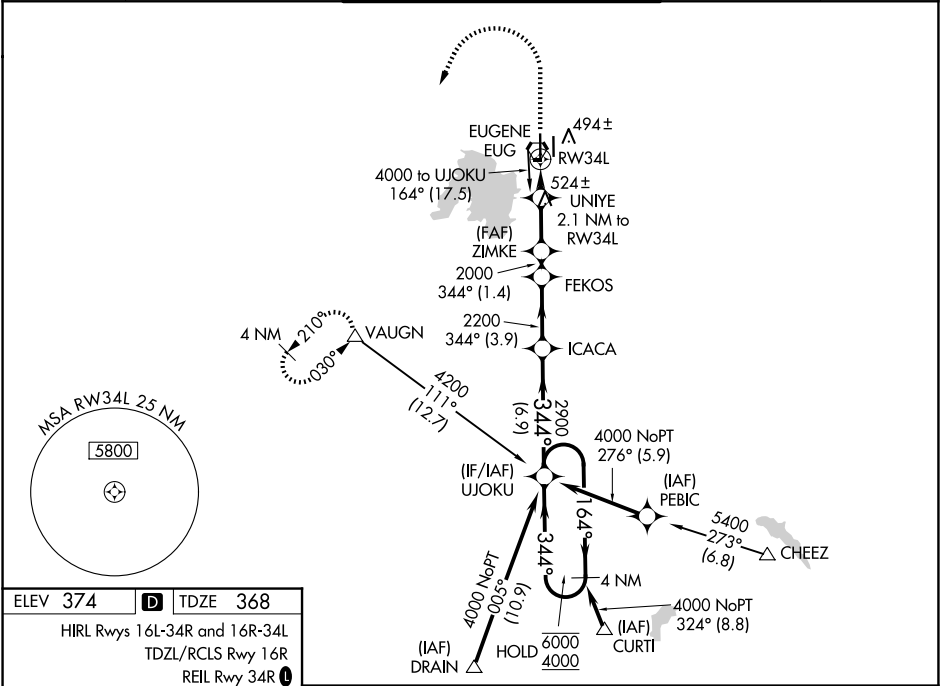

ELEV 374 D TDZE 368		HIRL Rwys 16L-34R and 16R-34L TDZL/RCLS Rwy 16R REIL Rwy 34R			
1500 4000 VAUGN △		*LNAV only UNIYE 2.1 NM to RW34L *1.1 NM to RW34L 1080* 2000			
		1.1 NM 1 NM 2.9 NM 1.4 NM 3.9 NM 6.9 NM			
CATEGORY		A		B	
LPV DA		568/40		200 (200-¾)	
LNAV/VNAV DA		657/40		289 (300-¾)	
LNAV MDA		760/40 392 (400-¾)		760/50 392 (400-1)	
CIRCLING		820-1 446 (500-1)		840-1 466 (500-1)	
		1000-1¾ 626 (700-1¾)		1140-2½ 766 (800-2½)	

NW-1, 27 NOV 2025 to 25 DEC 2025

NW-1, 27 NOV 2025 to 25 DEC 2025