

LOC I-TOL

109.7

APP CRS

072°

Rwy Ldg

10599

TDZE

683

Apt Elev

683

ILS Z or LOC Z RWY 7

EUGENE F KRANZ TOLEDO EXPRESS (TOL)

ADF or RADAR required for procedure entry. RNAV 1-GPS required.
ADF required for LOC only.


ALSIF-2

MISSED APPROACH: Climb to 1200 then climbing right turn to 2500 direct WUPTA and hold.

ASR

For inop ALS, increase S-ILS 7 Cat E visibility to RVR 4000,
S-LOC 7 Cat C/D/E visibility to 1 3/8 SM.

ATIS	TOLEDO APP CON	TOLEDO TOWER	GND CON	CLNC DEL
118.75 290.225	134.35 317.55	118.1 285.4	121.9 348.6	121.75 348.6

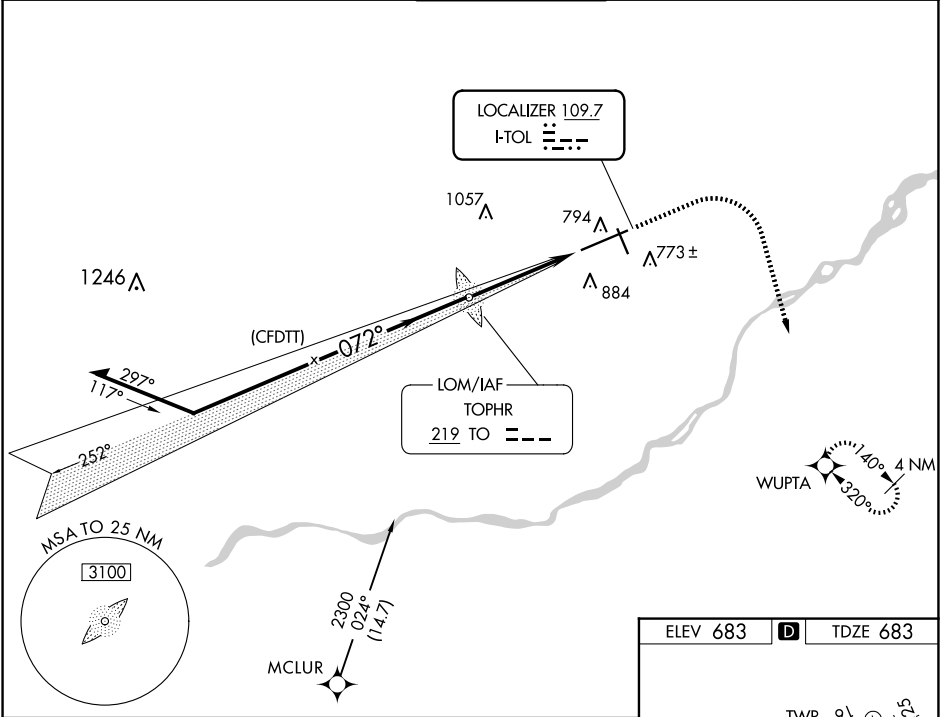

Remain within 15 NM

TO LOM

1200 2500 WUPTA

2300 2143 2200

GS 3.00° TCH 59

4.4 NM

TWR 91

10600 X 150

0.3% UP

3599 X 150

0.3% UP

072°

CATEGORY	A	B	C	D	E
S-ILS 7	883/18 200 (200-1/2)				
S-LOC 7	1140/24 457 (500-1/2)	1140/45 457 (500-7/8)			
CIRCLING	1200-1 517 (600-1)	1300-1 3/4 617 (700-1 3/4)	1360-2 1/4 677 (700-2 1/4)	1360-2 1/2 677 (700-2 1/2)	
FAF to MAP 4.4 NM					
TDZ/CL Rwy 7 HIRL Rwy 7-25 MIRL Rwy 16-34 REIL Rws 16 and 34					
Knots 60 90 120 150 180 Min:Sec 4:24 2:56 2:12 1:46 1:28					