WAAS CH 69629 W32A	APP CRS 317°	Rwy ldg 6236 TDZE 2605 Apt Elev 2613

RNAV (GPS) RWY 32
PECOS MUNI (PEQ)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using Wink altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. When local altimeter setting not received, use Wink altimeter setting: increase LPV DA to 2900 feet, LNAV/VNAV DA to 2950 feet and all visibilities ¼ SM; increase all MDA 100 feet and visibility Cat C and LNAV Cat D ¼ SM. Circling Rwy 9, 27 NA at night.

MISSED APPROACH: Climb to 4600 direct WALOM and hold.

AWOS-3	ALBUQUERQUE CENTER	UNICOM
118.175	135.875 292.15	122.8 (CTAF) L

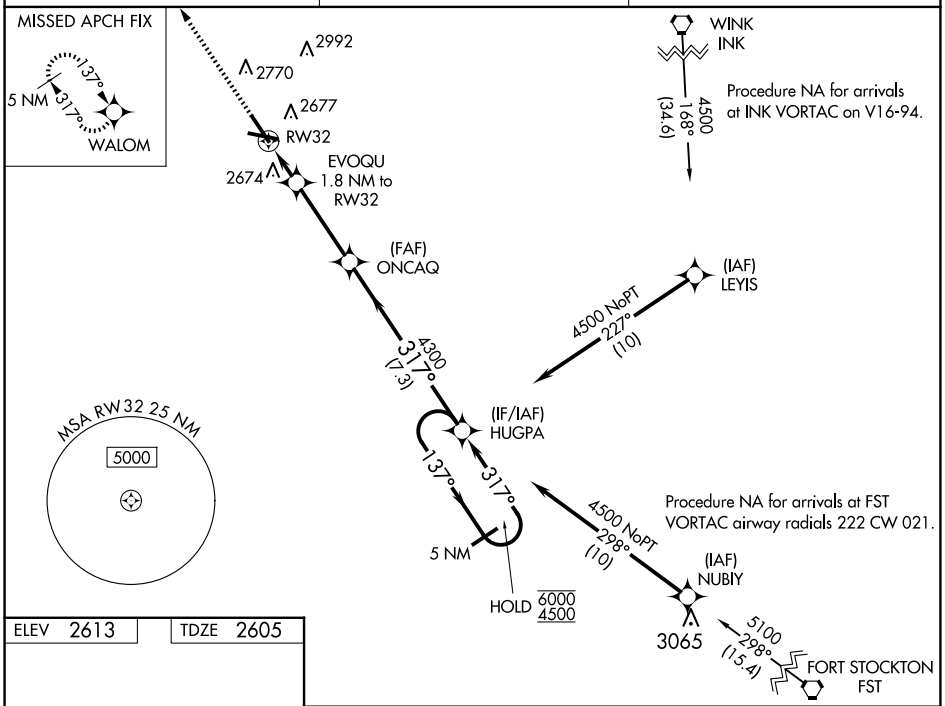

ELEV 2613	TDZE 2605

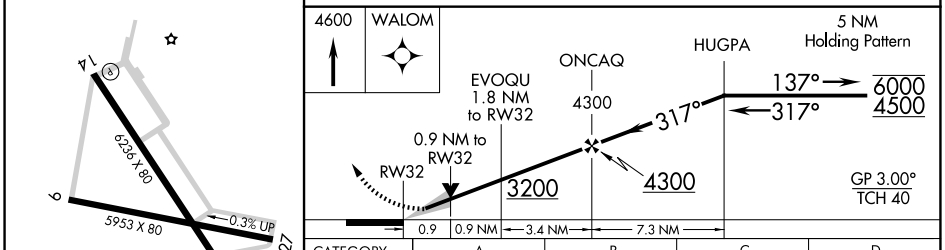

CATEGORY		A	B	C	D
LPV	DA	2805-¾ 200 (200-¾)			
LNAV/VNAV	DA	2855-¾ 250 (300-¾)			
LNAV	MDA	2940-1 335 (400-1)			
C CIRCLING		3060-1 447 (500-1)	3140-1 527 (600-1)	3360-2¼ 747 (800-2¼)	3360-2½ 747 (800-2½)

MIRL Rwys 9-27 and 14-32 L

SC-3, 27 NOV 2025 to 25 DEC 2025