

WAAS CH 48820 W35A	APP CRS 352°	Rwy Idg TDZE Apt Elev 6002 917 930
--	------------------------	--

RNAV (GPS) RWY 35R
SOUTH TEXAS RGNL AT HONDO (HDO)

RNP APCH.


▼

▲

Baro-VNAV NA when using Castroville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). Visibility reduction by helicopters NA. When local altimeter setting not received, use Castroville altimeter setting and increase all DA 62 feet and all MDA 80 feet, increase LNAV/VNAV all Cats, and LNAV and Circling Cats C and D visibility ¼ mile. Circling Rwy 8, 13, 17R, 26, 31, 35L NA at night.

MISSED APPROACH:
Climb to 3700 direct JENDE and hold.

ASOS 119.675	HOUSTON CENTER 134.95 269.4	UNICOM 122.725 (CTAF)
------------------------	---------------------------------------	---------------------------------

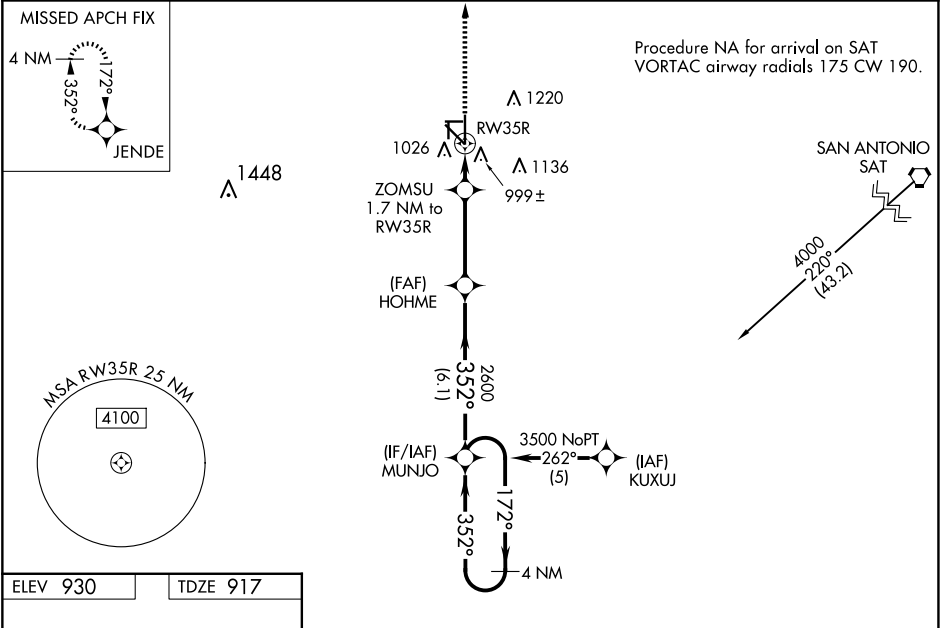

ELEV 930

TDZE 917

MIRL Rwy 17L-35R

352°

35L

35R

17L

3451 X 75

3224 X 100

5545 X 150

0.3% UP

0.3% UP

0.3% UP

3700

JENDE

*LNAV only.

RW35R

ZOMSU 1.7 NM to RW35R

HOHME

2600

MUNJO

172°

352°

3500

GP 3.00°

TCH 45

4 NM Holding Pattern

1.7

3.4 NM

6.1 NM

CATEGORY	A	B	C	D
LPV DA	1170-1 253 (300-1)			
LNAV/VNAV DA	1293-1¼ 376 (400-1¼)			
LNAV MDA	1360-1 443 (500-1)	1360-1¼ 443 (500-1¼)	1360-1½ 443 (500-1½)	
CIRCLING	1440-1 510 (600-1)	1520-1 590 (600-1)	1580-1¾ 650 (700-1¾)	1580-2 650 (700-2)