

LOC I-MLB	APP CRS	Rwy Ldg	9482
108.3	274°	TDZE	26
		Apt Elev	33


LOC BC RWY 27L

MELBOURNE ORLANDO INTL (MLB)

DME or RADAR required.

MISSED APPROACH: Climb to 1600 on MLB VOR/DME R-272 to FIBOP/MLB VOR/DME 6.5 DME/RADAR and hold.

ATIS	ORLANDO APP CON	MELBOURNE TOWER ★	GND CON	UNICOM
132.55	126.025 281.425	118.2 (CTAF) 257.8	121.9	122.95

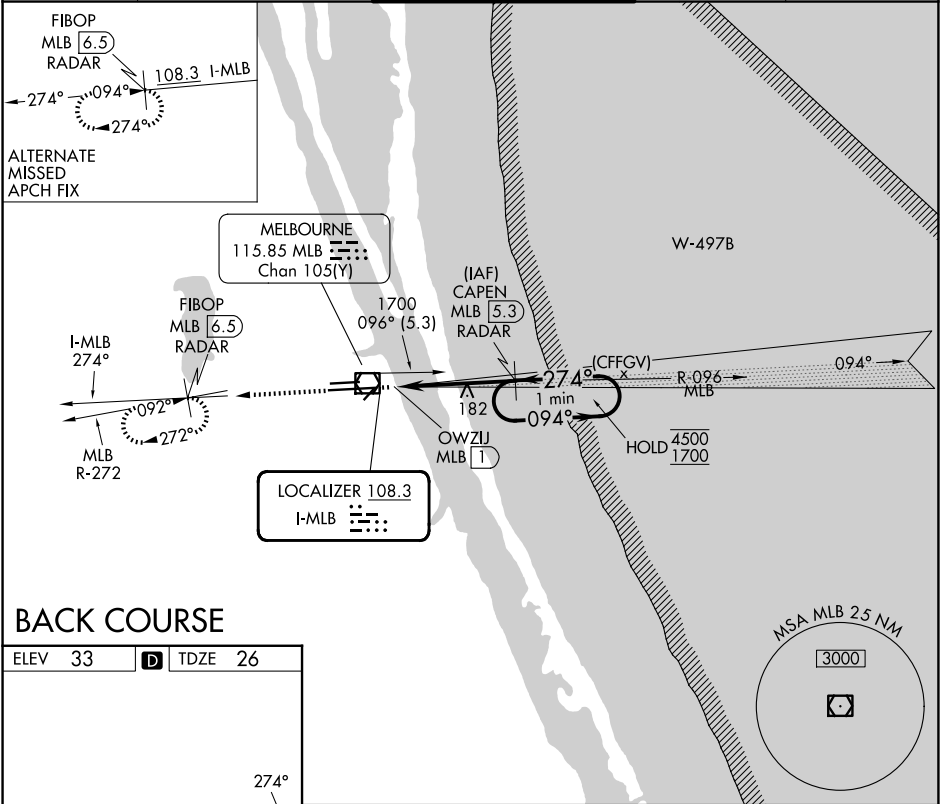

BACK COURSE

ELEV 33	D	TDZE 26
---------	---	---------

TDZ/CL Rwy 9R
REIL Rwy 27L
MIRL Rwy 5-23 and 9L-27R
HIRL Rwy 9R-27L

FAF to MAP 4.3 NM

Knots	60	90	120	150	180
Min:Sec	4:18	2:52	2:09	1:43	1:26

	1600	FIBOP MLB 6.5	CAPEN MLB 5.3 RADAR	One Minute Holding Pattern
	MLB R-272	OWZIJ MLB 1	MLB 1.5	094° → 4500 ← 274° 1700
			274°	Disregard GS indications.
	0.8	0.5 NM	3.8 NM	
CATEGORY	A	B	C	D
S-27L	500-1	474 (500-1)	500-1 3/8	474 (500-1 3/8)
CIRCLING	500-1 467 (500-1)	560-1 527 (600-1)	680-1 3/4 647 (700-1 3/4)	880-2 3/4 847 (900-2 3/4)