

WAAS CH 61135 W36A	APP CRS 004°	Rwy Idg 4000 TDZE 547 Apt Elev 551
--	------------------------	---


RNAV (GPS) RWY 36
NORTHWEST ALABAMA RGNL (MSL)

RNP APCH-GPS.

▼ Circling to Rwy 18 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. Baro-VNAV and VDP NA when using Decatur altimeter setting. When local altimeter setting not received, use Decatur altimeter setting and increase LPV DA to 874, LNAV/VNAV DA to 1012 and all MDA 100 feet, increase LPV and LNAV/VNAV all Cats visibility ¼ mile, increase LNAV Cats C/D visibility ¼ mile, and Circling Cats C/D visibility ½ mile.

MISSED APPROACH:
Climb to 3000 direct TUBYO and hold.

ASOS 119.425	MEMPHIS CENTER 120.8 307.0	GCO 121.725	UNICOM 123.05 (CTAF) 0
------------------------	--------------------------------------	-----------------------	----------------------------------

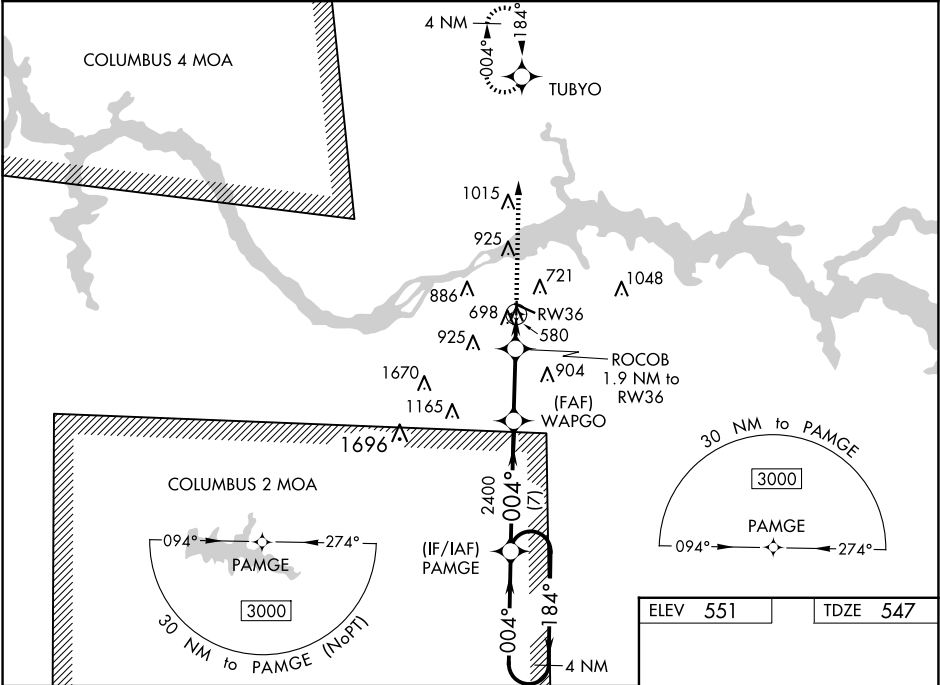

4 NM Holding Pattern		PAMGE		WAPGO		ROCOB 1.9 NM to RW36		*LNAV only.	
3000		184°		004°		2400		*1.2 NM to RW36	
GP 3.00°		TCH 40		7 NM		3.8 NM		0.7 NM	
CATEGORY		A		B		C		D	
LPV DA				797-1		250 (300-1)			
LNAV/VNAV DA				935-1 3/8		388 (400-1 3/8)			
LNAV MDA		960-1		413 (500-1)		960-1 1/8		413 (500-1 1/8)	
CIRCLING		1040-1		489 (500-1)		1280-2		1280-2 1/4	
						729 (800-2)		729 (800-2 1/4)	

