


VORTAC RBL 115.7 Chan 104	APP CRS 328°	Rwy Ldg 5431 TDZE 352 Apt Elev 352
---	------------------------	---

VOR RWY 33
RED BLUFF MUNI (RBL)

▼ When local altimeter setting not received, use Redding altimeter setting and increase all MDAs 80 feet and all Cat C/D visibilities ¼ SM. ▲	MISSED APPROACH: Climb to 1500, then climbing right turn to 2000 direct RBL VORTAC and hold.
---	--

ASOS 120.775	OAKLAND CENTER 132.2 350.3	UNICOM 123.0 (CTAF) 0
------------------------	--------------------------------------	---------------------------------

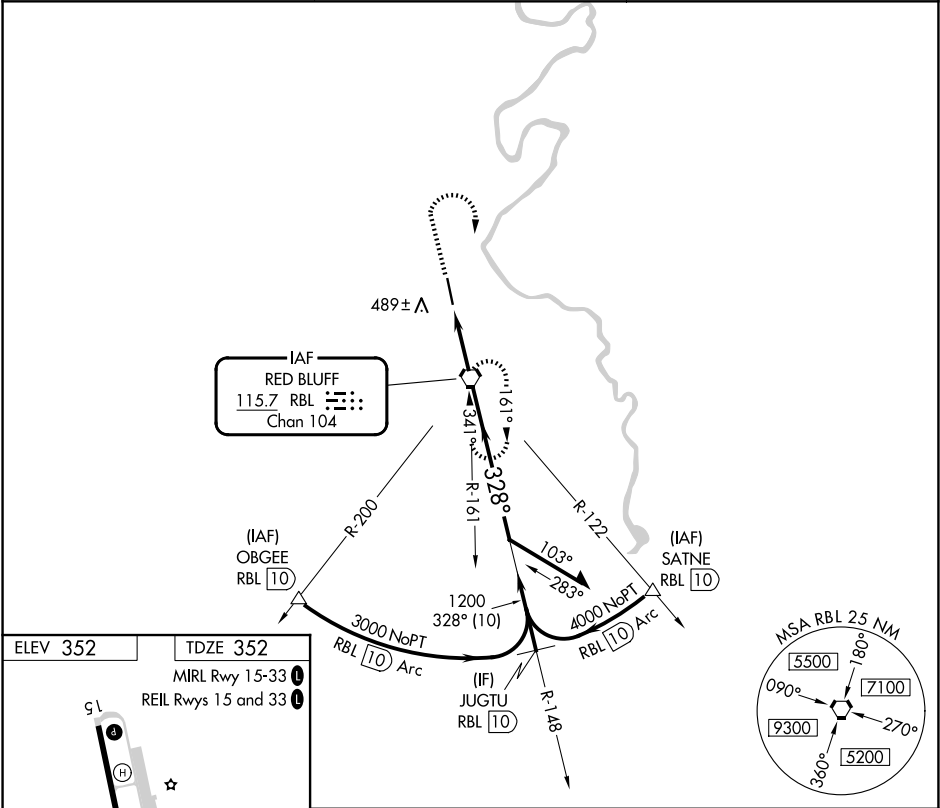

ELEV 352	TDZE 352
MIRL Rwy 15-33	
REIL Rwys 15 and 33	
5431 X 100	
33	
328°	
FAF to MAP 2.7 NM	
Knots	60 90 120 150 180
Min:Sec	2:42 1:48 1:21 1:05 0:54

1500	2000	RBL	RBL VORTAC	2300	148°	2100	328°	1200
Remain within 10 NM								
RBL 2.7								
TCH 40								
2.83°								
2.7 NM								
CATEGORY	A	B	C	D				
S-33	740-1 388 (400-1)				740-1¼ 388 (400-1¼)			
CIRCLING	880-1 528 (600-1)				900-1½ 548 (600-1½)		1060-2¼ 708 (800-2¼)	