


WAAS CH 77522 W35A	APP CRS 353°	Rwy Ldg 12300 TDZE 1271 Apt Elev 1288
--	------------------------	--

RNAV (GPS) RWY 35

SALINA RGNL (SLN)

DME/DME RNP-0.3 NA. Baro-VNAV NA below -17°C (2°F). Circling NA for Cat D southwest of Rwy 12-30. For inoperative MALSR, increase LNAV Cat D visibility to 1¼ and LPV visibility all Cats to ¾.	MALSR	MISSED APPROACH: Climb to 3400 direct KOWDU and hold.
--	--	--

ATIS 120.15	KANSAS CITY CENTER 134.9 363.2	SALINA TOWER★ 119.3 (CTAF) 0 257.7	GND CON 121.9 360.8	UNICOM 122.95
-----------------------	--	--	-------------------------------	-------------------------

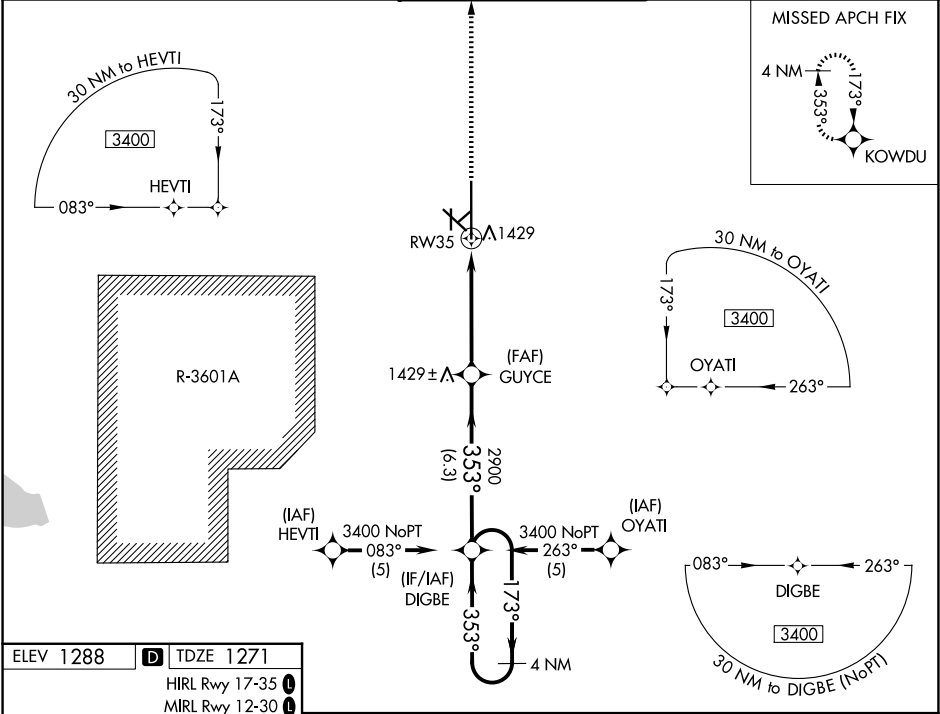

ELEV 1288

TDZE 1271

HIRL Rwy 17-35

MIRL Rwy 12-30

3400

KOWDU

* LNAV only

1.1 NM

3.8 NM

6.3 NM

* 1.1 NM to RW35

2900

DIGBE

4 NM Holding Pattern

GUYCE

2900

173°

353°

3400

GP 3.00°

TCH 48

CATEGORY

A

B

C

D

1521-1½

250 (300-½)

LNAV/VNAV

DA

1623-¾

352 (400-¾)

LNAV

MDA

1680-1½

409 (400-½)

1680-¾

409 (400-¾)

1680-1

409 (400-1)

CIRCLING

1820-1¼

532 (600-1¼)

1840-1¼

552 (600-1¼)

1860-1½

572 (600-1½)

1860-2

572 (600-2)

1820-1¼

532 (600-1¼)

1840-1¼

552 (600-1¼)

1860-1½

572 (600-1½)

1860-2

572 (600-2)