


BOWIE EIGHT DEPARTURE

RADAR required.
DME required.

SAN ANTONIO DEP CON
125.7 290.225
ATIS
128.8
CLNC DEL (When twr closed)
121.7
GND CON
121.7 379.9
STINSON TOWER *
118.2 (CTAF) 379.9

SAN ANTONIO
116.8 SAT
Chan 115

STINSON
108.4 SSF



COTULLA
115.8 COT
Chan 105

14500
*2000
195°
(82)


LAREDO
117.4 LRD
Chan 121

ALICE
114.5 ALI

CORPUS CHRISTI
115.5 CRP
Chan 102

TAKEOFF MINIMUMS

- Rwy 10: Standard with minimum climb of 230'/NM to 1900.
- Rwy 14: Standard with minimum climb of 220'/NM to 1900.
- Rwy 28: 300-1 $\frac{5}{8}$ or standard with minimum climb of 230'/NM to 900, or alternatively, with standard takeoff minimums and a normal 200'/NM climb gradient, takeoff must occur no later than 1800' prior to DER.
- Rwy 32: Standard with minimum climb of 230'/NM to 1700.

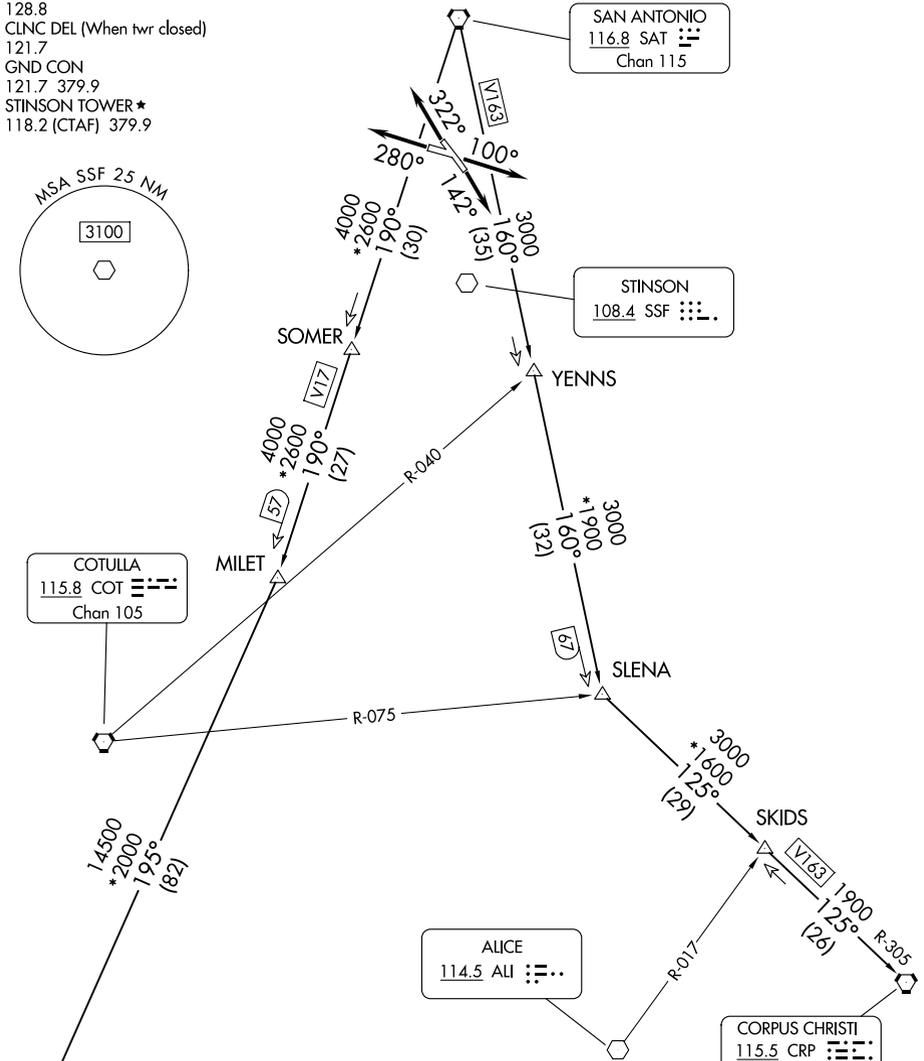

SC-3, 27 NOV 2025 to 25 DEC 2025

SC-3, 27 NOV 2025 to 25 DEC 2025

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)

BOWIE EIGHT DEPARTURE