



LOC I-TVC 110.7	APP CRS 279°	Rwy Ldg 7016 TDZE 616 Apt Elev 624
---------------------------	------------------------	--

ILS or LOC RWY 28

CHERRY CAPITAL (TVC)

RNP APCH - GPS.		MALSR 	MISSED APPROACH: Climb to 1100 then climbing left turn to 3000 direct TVC VOR/DME and hold, continue climb-in-hold to 3000.	
Aircraft not GPS equipped - RADAR required for procedure entry.				
▼ ▲ ❄ -21°C	S-LOC 28 minimums: For inop ALS, increase S-LOC 28 Cats C and D visibility to 2 ½ SM. AYATA FIX minimums: For inop ALS, increase S-LOC 28 Cats C and D visibility to 2 SM.			
ATIS 119.175	MINNEAPOLIS CENTER 132.9 338.3	TRAVERSE CITY TOWER ★ 124.2 (CTAF) 0 348.6	GND CON 121.8 348.6	UNICOM 122.95

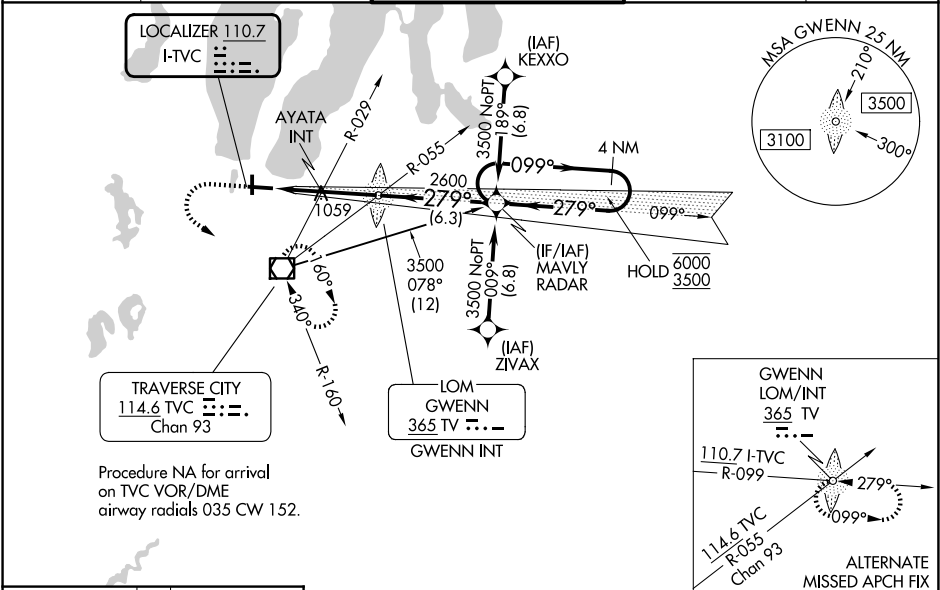

ELEV 624	D	TDZE 616
		
HIRL Rwy 10-28 MIRL Rwy 18-36 REIL Rwy 36		
FAF to MAP 5.8 NM		
Knots	60	90 120 150 180
Min:Sec	5:48	3:52 2:54 2:19 1:56

CATEGORY	TVS and ILS glidepath not coincident (TVS Angle 3.00/TCH 45).			
	TVS and ILS glidepath not coincident (TVS Angle 3.00/TCH 45).			
S-ILS 28	816-1/2 200 (200-1/2)			
S-LOC 28	1440-1/2 824 (900-1/2)	1440-3/4 824 (900-3/4)	1440-1 824 (900-1)	824 (900-1 1/2)
CIRCLING	1440-1 1/4	816 (900-1 1/4)	1440-2 1/2 816 (900-2 1/2)	1720-3 1096 (1100-3)
AYATA FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)				
S-LOC 28	1320-1/2	704 (700-1/2)	1320-1 1/2	704 (700-1 1/2)
CIRCLING	1320-1	696 (700-1)	1420-2 1/4 796 (800-2 1/4)	1720-3 1096 (1100-3)