



LOC I-ILM 110.3	APP CRS 349°	Rwy Ldg TDZE 7204 31 Apt Elev 32
---------------------------	------------------------	---

ILS Y or LOC RWY 35

WILMINGTON INTL (ILM)

ADF required. RADAR required for procedure entry.		MALSR 	MISSED APPROACH: Climb to 600 then climbing left turn to 1800 direct AIRL LOM and hold.
	For inop ALS, increase S-LOC 35 Cat C/D visibility to 1½ SM.		

ATIS 124.975	WILMINGTON APP CON★ 118.25 284.65 (164°-343°) 135.75 317.425 (344°-163°)	WILMINGTON TOWER★ 119.9 (CTAF) 0 239.3	GND CON 121.9 348.6	UNICOM 122.95
------------------------	--	---	-------------------------------	-------------------------

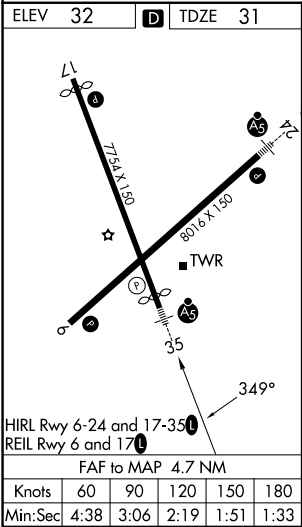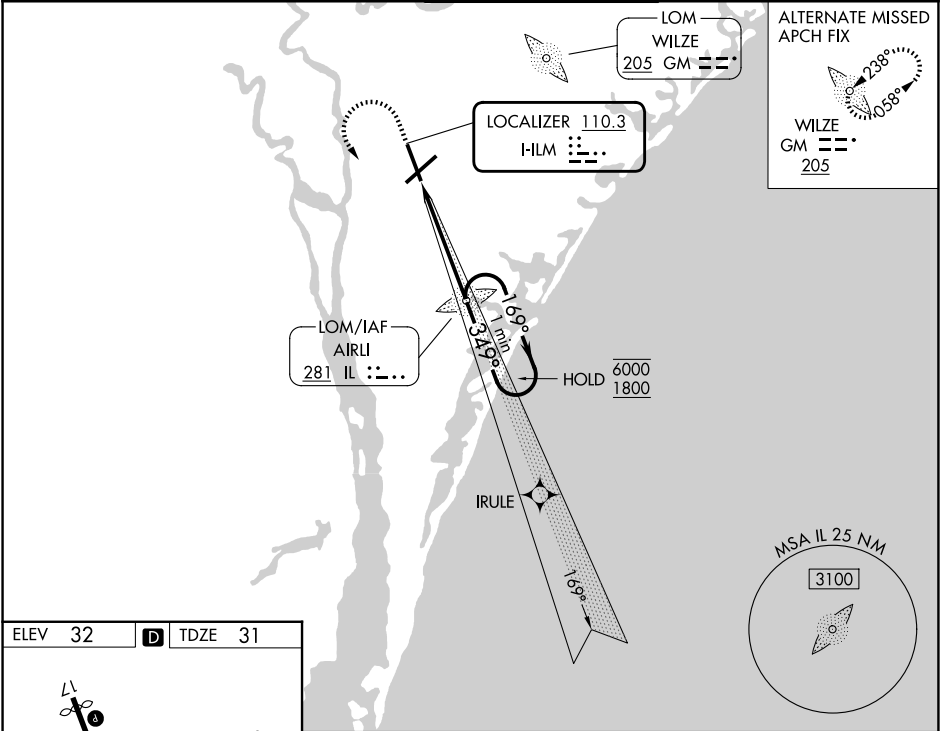

  				One Minute Holding Pattern	
600		1800		IL LOM 1576	
				6000 1800	
349°		169°		GS 3.00° TCH 37	
4.7 NM		1700			
CATEGORY	A	B	C	D	
S-ILS 35	242/24 211 (300-½)				
S-LOC 35	500/24 469 (500-½)		500/50 469 (500-1)		
CIRCLING	560-1 528 (600-1)		720-2 688 (700-2)		920-3 888 (900-3)