

WAAS CH 70419 W22A	APP CRS 222°	Rwy Ldg TDZE 4310 Apt Elev 4314
--	------------------------	---

RNAV (GPS) RWY 22

DEMING MUNI (DMN)

RNP APCH - GPS.


▼

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C or above 40°C. Baro-VNAV NA when using Las Cruces altimeter setting. When local altimeter setting not received, use Las Cruces altimeter setting and increase all DA 114 feet and all MDA 120 feet; increase LPV and LNAV/VNAV all Cats visibility ¼ mile, increase LNAV Cats C and D visibility ¼ mile, increase Circling Cat B visibility ¼ mile and Circling Cats C and D visibility ½ mile. Rwy 22 helicopter visibility reduction below 1 SM NA. Straight-in Rwy 22 NA at night, Circling Rwy 22, 26 NA at night.

MISSED APPROACH:
Climb to 9000 direct GINEC and on track 274° to FAAST and hold.

ASOS 118.525	ALBUQUERQUE CENTER 128.2 285.5	UNICOM 122.8 (CTAF) 0
------------------------	--	---------------------------------

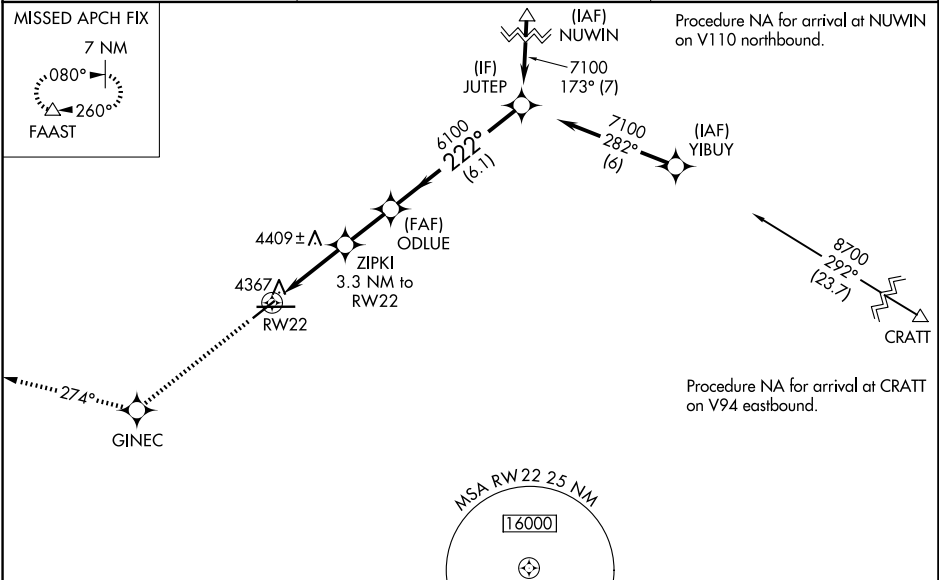




R-5115



9000 	GINEC 	tr 274°	FAAST 	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 44).		JUTEP
		ZIPKI 3.3 NM to RW22		ODLUE	7100	
RW22		5400		6100	222°	
		6100		222°		
		3.3 NM		2.1 NM	6.1 NM	
CATEGORY	A		B		C	
LPV DA	4560-1 250 (300-1)					
LNAV/VNAV DA	4637-1¼ 327 (400-1¼)					
LNAV MDA	4660-1 350 (400-1)					4660-1¼ 350 (400-1¼)
CIRCLING	4820-1 506 (600-1)	4940-1 626 (700-1)	5020-2 706 (800-2)		5020-2¼ 706 (800-2¼)	

ELEV 4314

TDZE 4310



MIRL Rwy 4-22

MIRL Rwy 8-26 0