


LOC/DME I-EVV 109.9 Chan 36	APP CRS 221°	Rwy Ldg TDZE 422 Apt Elev 422	8021
---	------------------------	---	-------------

ILS or LOC RWY 22
EVANSVILLE RGNL (EVV)

RADAR or DME required for procedure entry at AUGUS.		MALSR 	MISSED APPROACH: Climb to 1000 then climbing right turn to 2500 direct PXV VORTAC and hold.
Circling Rwy 9 NA at night. For inop ALS, increase S-LOC 22 Cats C and D visibility to 1¾ SM. DME minimums: For inop ALS, increase S-LOC 22 Cats C and D visibility to RVR 6000. * RVR 1800 authorized with use of FD or AP or HUD to DA.			

ATIS 120.2	EVANSVILLE APP CON ★ 124.025 290.9	EVANSVILLE TOWER ★ 118.7 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
----------------------	--	---	-------------------------	-------------------------

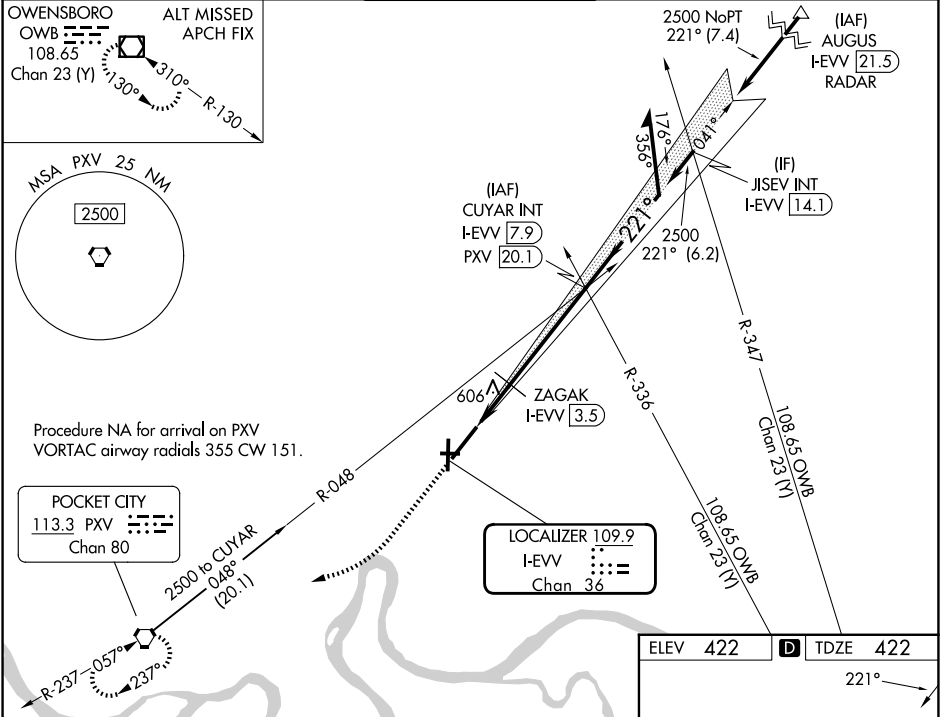

1000 ↑	2500 ↗	PXV 				
-----------	-----------	--	--	--	--	--

