



|                                        |                        |                             |                                           |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|
| WAAS<br>CH <b>77542</b><br><b>W34A</b> | APP CRS<br><b>339°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>7003</b><br><b>3916</b><br><b>3942</b> |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|

RNAV (GPS) RWY 34  
SOUTH BIG HORN COUNTY (GEY)

**⚠** Baro-VNAV NA when using Cowley/Lovell/Byron altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -26°C (-14°F) or above 51°C (124°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Cowley/Lovell/Byron altimeter setting and increase LPV DA to 4253 feet and LNAV/VNAV DA to 4327 feet. Increase LPV and LNAV/VNAV visibility all Cats ½ SM. Increase all MDAs 100 feet and LNAV visibility Cat B ¼ SM, Cats C/D ½ SM and Circling Cat B ¼ SM. VDP NA with Cowley/Lovell/Byron altimeter setting.

**MISSED APPROACH:** Climb to 4400 then climbing left turn to 9000 direct CRANY and hold, continue climb-in-hold 9000.

|         |                  |         |
|---------|------------------|---------|
| ASOS    | SALT LAKE CENTER | CTAF    |
| 135.325 | 127.75 351.9     | 122.9 0 |

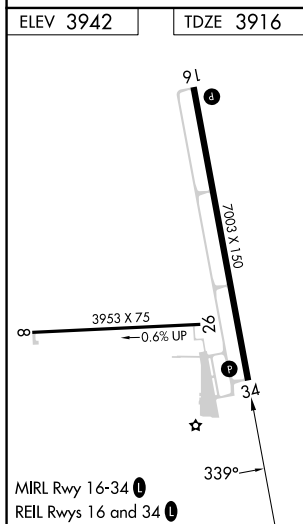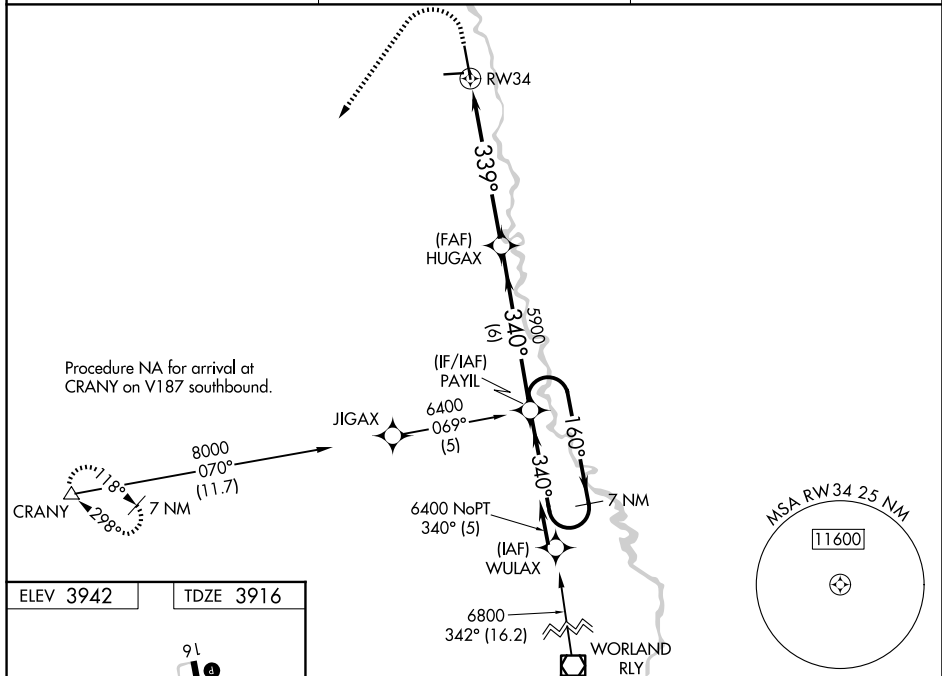

|                                                                                                                                                                                                                                                |                       |                                                        |                         |                                                                       |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|--------------------------------------------------------|-------------------------|-----------------------------------------------------------------------|--|
| <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">4400<br/>↑</div> <div style="text-align: center;">9000<br/>↘</div> <div style="text-align: center;">CRANY<br/>△</div> </div> |                       | <div style="text-align: center;">HUGAX<br/>5900</div>  |                         | <div style="text-align: center;">PAYIL<br/>7 NM Holding Pattern</div> |  |
| <div style="text-align: center;">*RNAV only.</div>                                                                                                                                                                                             |                       | <div style="text-align: center;">*2.1 NM to RW34</div> |                         | <div style="text-align: center;">160° → 6400<br/>← 340°</div>         |  |
| <div style="text-align: center;">RW34</div>                                                                                                                                                                                                    |                       | <div style="text-align: center;">339°</div>            |                         | <div style="text-align: center;">340°</div>                           |  |
| <div style="text-align: center;">2.1 NM</div>                                                                                                                                                                                                  |                       | <div style="text-align: center;">4 NM</div>            |                         | <div style="text-align: center;">6 NM</div>                           |  |
| <div style="text-align: center;">GP 3.00°<br/>TCH 50</div>                                                                                                                                                                                     |                       |                                                        |                         |                                                                       |  |
| CATEGORY                                                                                                                                                                                                                                       | A                     | B                                                      | C                       | D                                                                     |  |
| LPV DA                                                                                                                                                                                                                                         | 4166-¾                |                                                        | 250 (300-¾)             |                                                                       |  |
| LNAV/VNAV DA                                                                                                                                                                                                                                   | 4240-1                |                                                        | 324 (300-1)             |                                                                       |  |
| LNAV MDA                                                                                                                                                                                                                                       | 4640-1 724 (700-1)    |                                                        | 4640-2 724 (700-2)      |                                                                       |  |
| CIRCLING                                                                                                                                                                                                                                       | 4640-1<br>698 (700-1) | 4700-1¼<br>758 (800-1¼)                                | 5320-3<br>1378 (1400-3) | 5460-3<br>1518 (1600-3)                                               |  |