

WAAS CH 40430 W06A	APP CRS 056°	Rwy Ldg 5000 TDZE 405 Apt Elev 407
--	------------------------	---

RNAV (GPS) RWY 6

OWENSBORO/DAVIESS COUNTY RGNL (OWB)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DAE RNP-0.3 NA. Rwy 6 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Evansville altimeter setting: increase LPV DA to 719 feet and all Cats visibility ½ mile; increase LNAV/VNAV DA to 734 feet and all Cats visibility ¼ mile; increase all MDA 60 feet and LNAV Cats C/D and Circling Cats C/D visibility ¼ mile. Baro-VNAV and VDP NA when using Evansville altimeter setting.

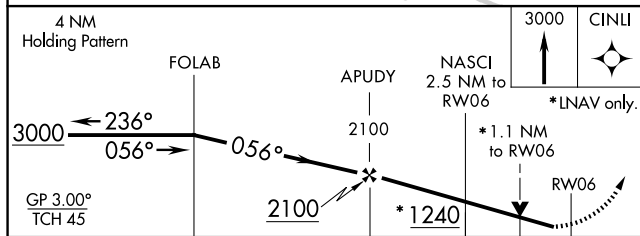
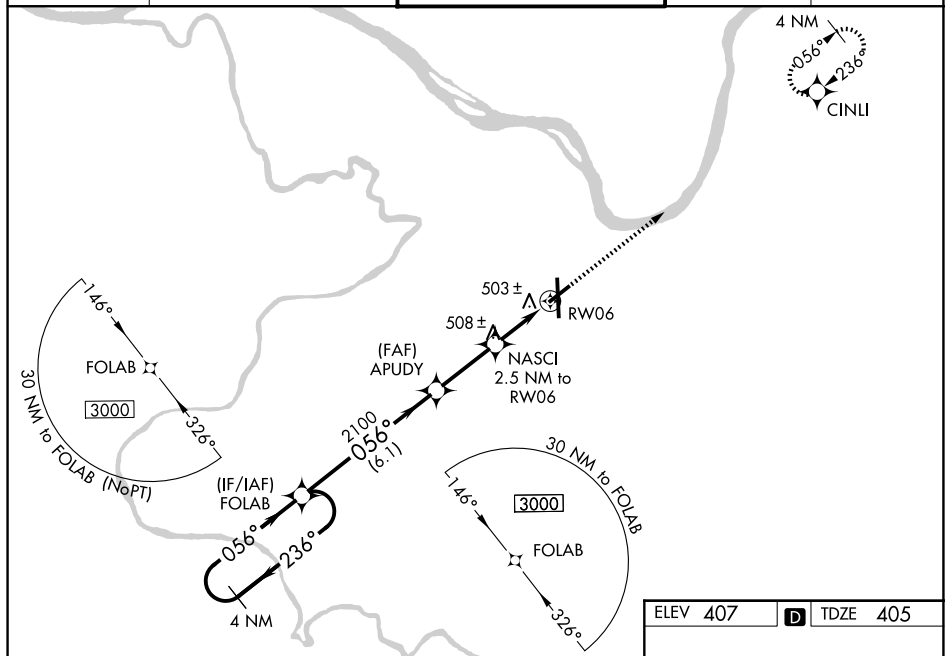
MISSED APPROACH:
Climb to 3000 direct
CINL and hold.

AWOS-3PT
119.025

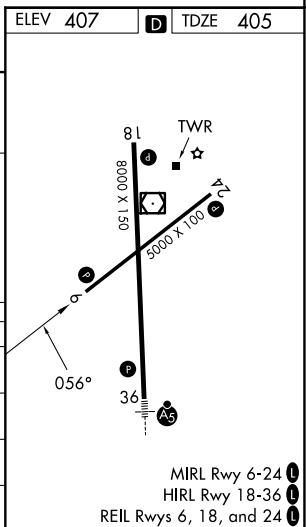
EVANSVILLE APP CON ★
124 025 290 9

OWENSBORO TOWER ★
120.7 (CTAF) **L** 251.15

GND CON
121 7

UNICOM
122 95

CATEGORY		A	B	C	D
LPV	DA	660-7 $\frac{7}{8}$		255 (300-7 $\frac{7}{8}$)	
LNAV/ VNAV	DA	675-7 $\frac{7}{8}$		270 (300-7 $\frac{7}{8}$)	
LNAV	MDA	800-1	395 (400-1)	800-1 $\frac{1}{8}$	395 (400-1 $\frac{1}{8}$)
CIRCLING		860-1 453 (500-1)	1120-1 713 (800-1)	1140-2 733 (800-2)	1140-2 $\frac{1}{4}$ 733 (800-2 $\frac{1}{4}$)



OWENSBORO, KENTUCKY

Amdt 1B 25MAR21

OWENSBORO/DAVIESS COUNTY RGNL (OWB)

37°44'N-87°10'W

RNAV (GPS) RWY 6

SE-1, 27 NOV 2025 to 25 DEC 2025

SE-1, 27 NOV 2025 to 25 DEC 2025