
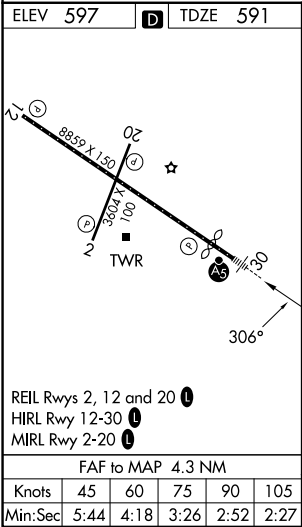


LOC I-GYY 108.75 Chan 24 (Y)	APP CRS 306°	Rwy Ldg TDZE Apt Elev	7959 591 597
--	------------------------	-----------------------------	---

COPTER ILS or LOC RWY 30
GARY/CHICAGO INTL (GYY)

 When local altimeter setting not received, use Chicago Midway Intl altimeter setting and increase all DA 46 feet and all MDA 60 feet. VDP NA with Chicago Midway Intl altimeter setting.	 MALSR	MISSED APPROACH: Climb to 1500 then climbing left turn to 2300 direct CGT VORTAC and hold.
--	-----------	--

ATIS 134.575	CHICAGO APP CON 133.1 285.6	GARY TOWER ★ 125.6 (CTAF) 0	GND CON 121.9
------------------------	---------------------------------------	--	-------------------------

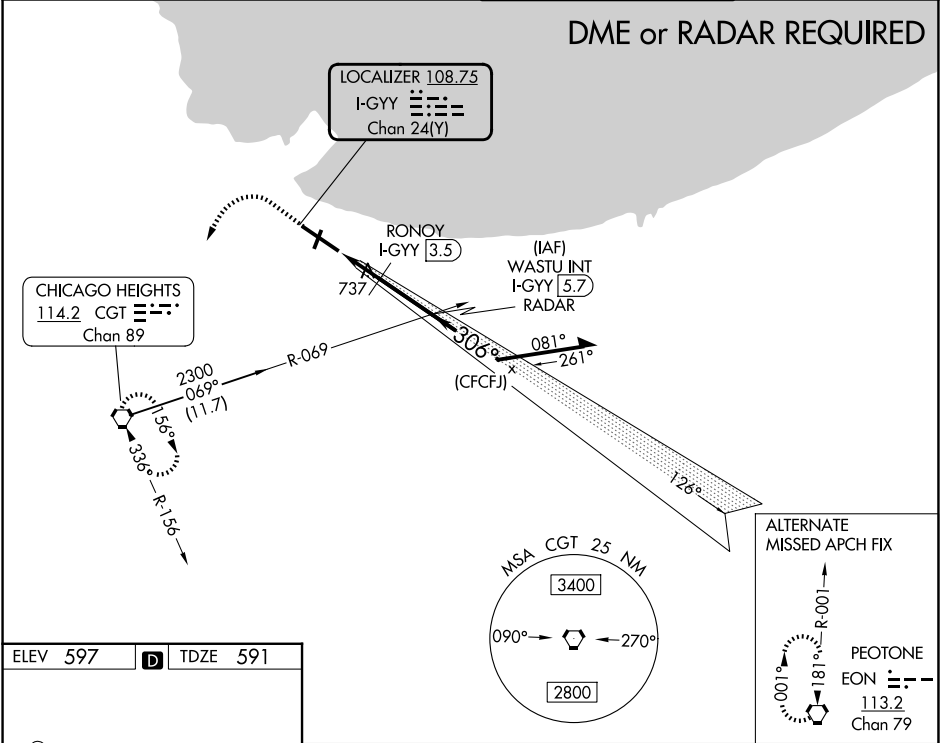

1500	2300	CGT	WASTU INT I-GYY 5.7 RADAR	Remain within 5 NM
#1300 when using Chicago Midway Int'l altimeter setting. *LOC only	RONOY I-GYY 3.5	*I-GYY 2.6	2000	2300
		*1240#	306°	GS 3.00° HCH 57
	1.1 NM	0.9 NM	2.3 NM	
CATEGORY	COPTER			
S-ILS 30	791-¼ 200 (200-¼)			
S-LOC 30	1240-¼ 649 (700-¼)			
RONOY FIX MINIMUMS				
S-LOC 30	1000-¼ 409 (500-¼)			

COPTER ILS or LOC RWY 30