

WAAS CH 93904 W17A	APP CRS 167°	Rwy Ldg TDZE 1864 Apt Elev 1864
--	------------------------	---


RNAV (GPS) RWY 17

RUSSELL MUNI (RSL)

⚠ Baro-VNAV and VDP NA when using Hays altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Hays altimeter setting: increase LPV DA all Cats to 2186 feet, LNAV/VNAV all Cats DA to 2244 feet and all visibilities ¼ SM; increase all MDA 80 feet and LNAV Cat C and Circling Cat C visibility ¼ SM. Circling NA to Rwys 3 and 21.

MISSED APPROACH:
Climb to 4000 direct
BAQFO and hold.

ASOS 128.325	KANSAS CITY CENTER 124.4 322.4	UNICOM 122.7 (CTAF) 0
------------------------	--	---------------------------------

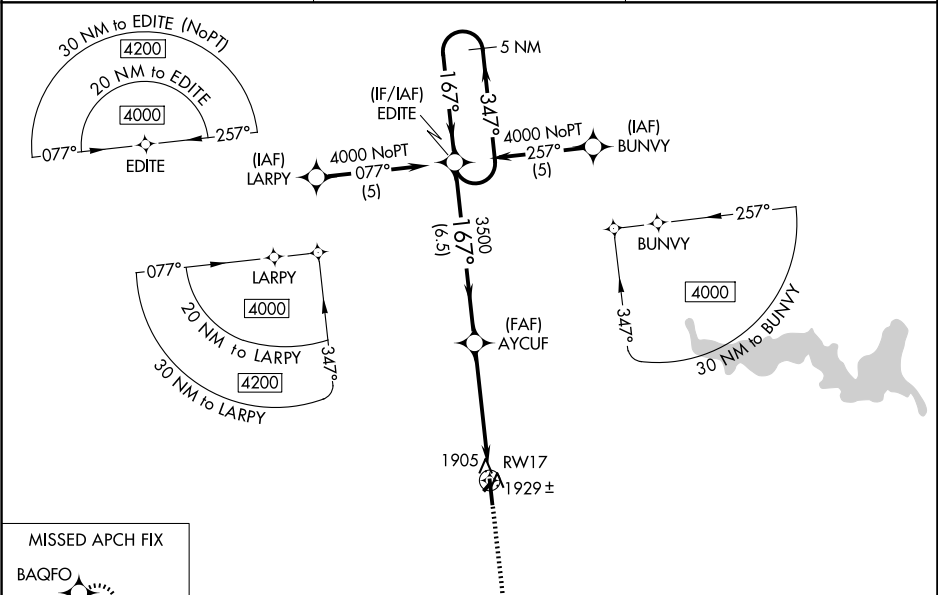

MISSED APCH FIX BAQFO 167° 347° 5 NM		ELEV 1864 TDZE 1864	
5 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 43).	
EDITE		AYCUF	
4000 ← 347° 167° →		3500	
GP 3.00° TCH 36		* 1 NM to RWY17 * LNAV only.	
6.5 NM		4 NM	
1 NM		RWY17	
CATEGORY	A	B	C
LPV DA	2117-1	253 (300-1)	NA
LNAV/VNAV DA	2175-1½	311 (400-1½)	NA
LNAV MDA	2220-1	356 (400-1)	NA
CIRCLING	2240-1 376 (400-1)	2320-1 456 (500-1)	2620-2¼ 756 (800-2¼)