

LOC I- <u>UIN</u> 110.1	APP CRS 218°	Rwy Idg TDZE Apt Elev	7098 753 768
-----------------------------------	------------------------	-----------------------------	---

LOC BC RWY 22
QUINCY RGNL-BALDWIN FLD (UIN)


RADAR required for procedure entry at MALGA. RNP APCH - GPS.

V VDP NA when using Pittsfield altimeter setting. When local altimeter setting not received, use Pittsfield altimeter setting and increase all MDAs 80 feet and S-22 visibility Cat C/D ½ SM. DME from UIN TACAN. DME use requires simultaneous reception of I-UIN and UIN DME.

Δ NA

MISSED APPROACH: Climb to 1200 then climbing left turn to 2400 direct FANUT and hold.

ASOS 121.425	KANSAS CITY CENTER 126.225 317.775	UNICOM 123.0 (CTAF) 0
------------------------	--	--

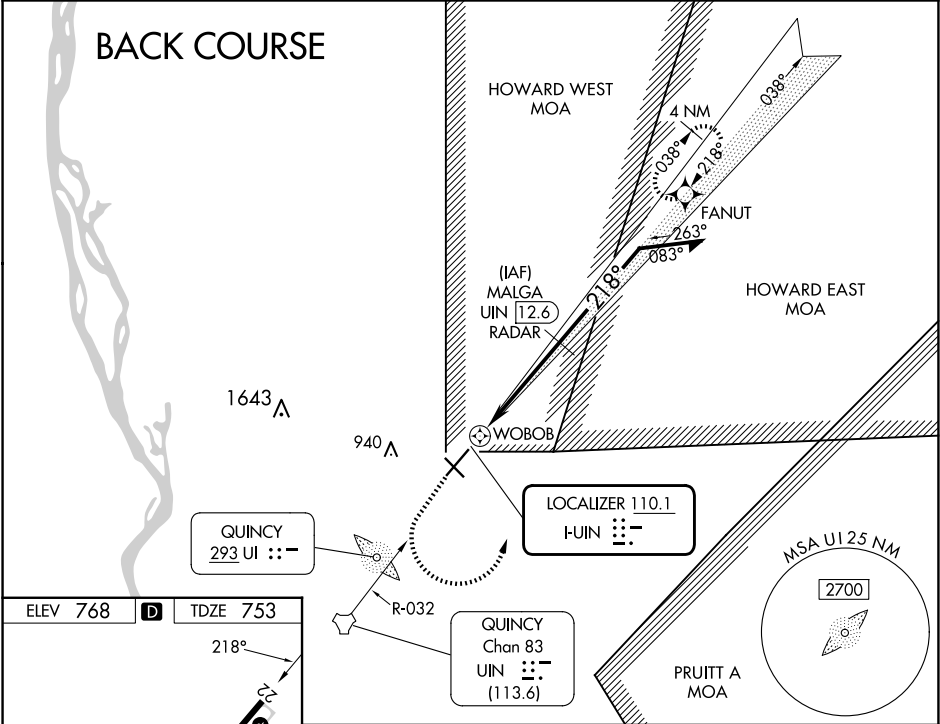

1200		2400	FANUT	MALGA UIN 12.6 RADAR		Remain within 10 NM	
UIN 8.8		WOBBOB		038°		218°	
2400		2400		038°		2400	
≤ 3.00°		TCH 46		Disregard GS indications.			
0.7		0.6		3.8 NM			
CATEGORY	A		B		C		D
S-22	1180-1		427 (500-1)		1180-1¼		427 (500-1¼)
C CIRCLING	1180-1		1220-1		1240-1½		1320-2
	412 (500-1)		452 (500-1)		472 (500-1½)		552 (600-2)