

LOC/DME I-EAU 109.5 Chan 32	APP CRS 224°	Rwy Ldg TDZE Apt Elev 7301 913 913	ILS or LOC RWY 22 CHIPPEWA VALLEY RGNL (EAU)
---	------------------------	--	---

From DRDAN and MENRD RNAV-1 GPS required.
DME required.


⚠

For inop ALS increase S-LOC 22 Cat C and D visibility to ¾ SM. For inop ALS when using Rice Lake altimeter setting, increase S-ILS 22 all Cats visibility to 1 SM. When local altimeter setting not received, use Rice Lake altimeter setting and increase DA 110 feet and all MDA 120 feet, increase S-LOC 22 Cat C and D and Circling Cat C visibility ¼ SM. VDP NA when using Rice Lake altimeter setting.

MALSR

MISSED APPROACH: Climb to 1600 then climbing right turn to 3500 on EAU VORTAC R-047 to IROKE/I-EAU LOC/DME 13.4 DME and hold.

ATIS 126.025	MINNEAPOLIS CENTER 125.3 335.6	EAU CLAIRE TOWER ★ 118.575 (CTAF) 0	GND CON 120.925	UNICOM 122.95
------------------------	--	---	---------------------------	-------------------------

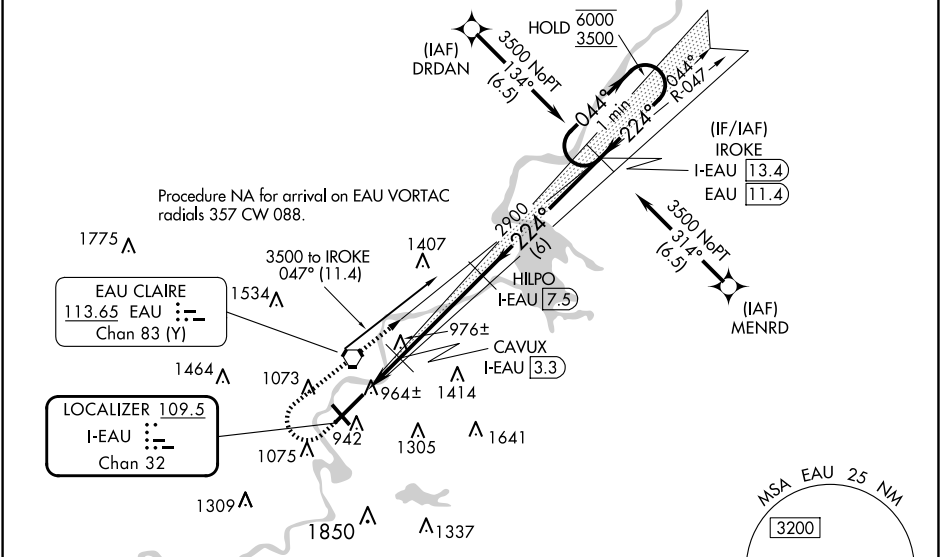

ELEV 913 D TDZE 913

HIRL Rwy 4-22
MIRL Rwy 14-32
REIL Rwy 4 and 14

TWR 968

224°

5000 X 100

810 X 150

0.6% DOWN

941

32

1600 3500 IROKE I-EAU 13.4

Use I-EAU DME when on the localizer course.

One Minute Holding Pattern

* LOC only

* I-EAU 2.2 CAVUX I-EAU 3.3 HILPO I-EAU 7.5 IROKE I-EAU 13.4

044° 6000 224° 3500

1560* 2900

GS 3.00° TCH 50

0.8 1.1 NM 4.2 NM 6 NM

CATEGORY	A	B	C	D
S-ILS 22	1113-½	200 (200-½)		
S-LOC 22	1220-½	307 (400-½)		
CIRCLING	1480-1 567 (600-1)	1540-1 627 (700-1)	1660-2¼ 747 (800-2¼)	2200-3 1287 (1300-3)