

|                                        |                        |                                                               |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS<br>CH <b>87006</b><br><b>W22A</b> | APP CRS<br><b>224°</b> | Rwy Idg <b>7301</b><br>TDZE <b>913</b><br>Apt Elev <b>913</b> |
|----------------------------------------|------------------------|---------------------------------------------------------------|

RNAV (GPS) RWY 22  
CHIPPEWA VALLEY RGNL (EAU)

RNP APCH.

**T** Baro-VNAV and VDP NA when using Rice Lake altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. When local altimeter setting not received, use Rice Lake altimeter setting and increase LPV DA to 1223, LNAV/VNAV DA to 1285, and increase LNAV/VNAV visibility all Cats ¼ SM; increase all MDA 120 feet and LNAV Cats C/D visibility ¾ SM and Circling Cat C visibility ¼ SM. For inop ALS increase LNAV/VNAV visibility all Cats to ¾ SM and LNAV Cats C/D visibility to 1 SM. For inop ALS when using Rice Lake altimeter setting increase LPV visibility all Cats to 1 SM and LNAV Cats C/D visibility to 1 ¾ SM.

MALSR

**MISSED APPROACH:**  
Climb to 1320 then  
climbing right turn to  
3500 direct IROKE  
and hold.

|                 |                                   |                                        |                    |                  |
|-----------------|-----------------------------------|----------------------------------------|--------------------|------------------|
| ATIS<br>126.025 | MINNEAPOLIS CENTER<br>125.3 335.6 | EAU CLAIRE TOWER ★<br>118.575 (CTAF) 0 | GND CON<br>120.925 | UNICOM<br>122.95 |
|-----------------|-----------------------------------|----------------------------------------|--------------------|------------------|

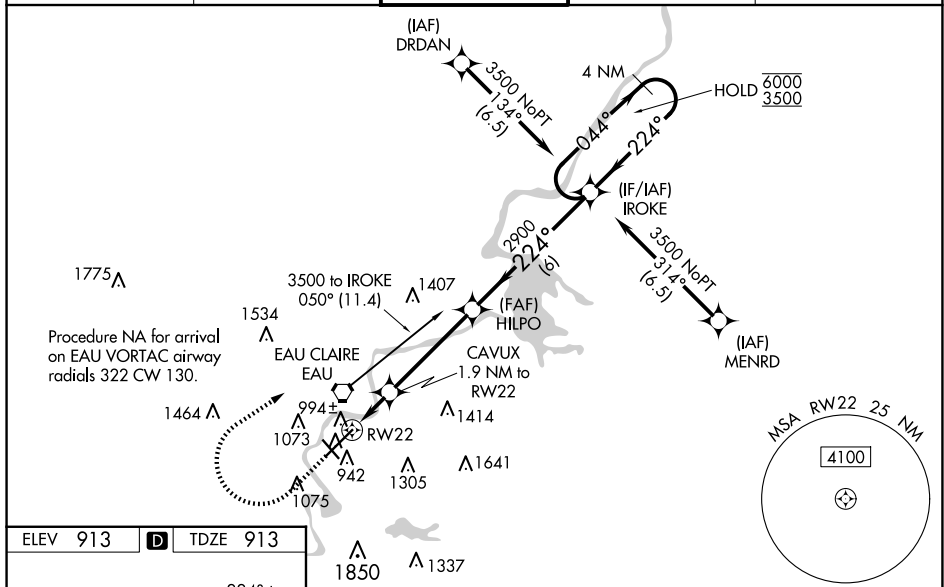


Diagram illustrating the IROKE Holding Pattern and associated flight information:

- Holding Pattern:** 4 NM Holding Pattern. Inbound: 224°. Outbound: 044°.
- Waypoints and Distances:**
  - RW22 (0.9 NM to HILPO)
  - CAVUX (1.9 NM to RW22)
  - HILPO (2900)
  - 1560 (4.2 NM to HILPO)
  - 6 NM to IROKE
- Altitudes:** 1320, 3500, 2900, 1560.
- Navigation:** \*LNAV only, \*0.9 NM to RW22.
- GP 3.00° TCH 50**

| CATEGORY     | A                  | B                  | C                    | D                    |
|--------------|--------------------|--------------------|----------------------|----------------------|
| LPV DA       | 1113-½             | 200 (200-½)        |                      |                      |
| LNAV/VNAV DA | 1175-½             | 262 (300-½)        |                      |                      |
| LNAV MDA     | 1260-½ 347 (400-½) | 1260-⅝ 347 (400-⅝) |                      |                      |
|              | 1480-1 567 (600-1) | 1540-1 627 (700-1) | 1660-2¼ 747 (800-2¼) | 2200-3 1287 (1300-3) |

**Legend:** CIRCLING

RNAV (GPS) RWY 22