

WAAS CH 49120 W33A	APP CRS 329°	Rwy Ldg TDZE 89 Apt Elev 99
--	------------------------	---

RNAV (GPS) RWY 33L

LONG ISLAND MAC ARTHUR (ISP)


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C (7°F) or above 54°C (130°F).
DME/DME RNP-0.3 NA. When local altimeter setting not received, use Shirley altimeter setting and increase LPV DA to 367 feet, LNAV/VNAV DA to 440 feet and LPV and LNAV/VNAV visibility all Cats 1/8 mile, all MDA 40 feet, increase LNAV Cats C/D visibility 1/8 mile, and Circling Cats C/D visibility 1/4 mile. VDP and Baro-VNAV NA when using Shirley altimeter setting. Helicopter visibility reduction below 3/4 SM NA.


MISSED APPROACH:

Climb to 600 then climbing right turn to 2000 direct CCC VOR/DME and hold.

ATIS 120.725	NEW YORK APP CON 120.05 343.75	LONG ISLAND TOWER* 119.3 (CTAF) 0335.5	GND CON 135.3	CLNC DEL 121.85	UNICOM 122.95
------------------------	--	--	-------------------------	---------------------------	-------------------------

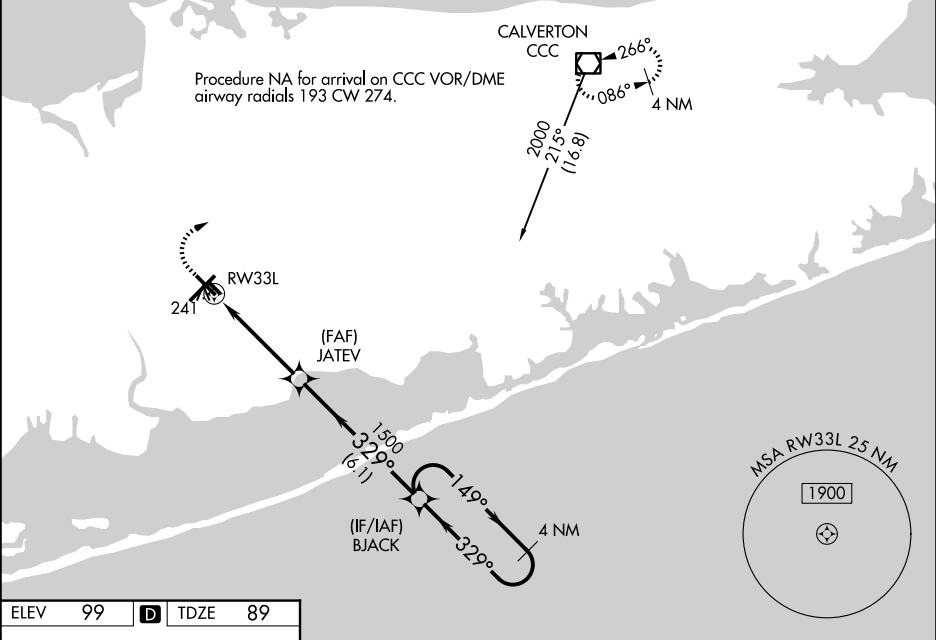

ELEV 99	D	TDZE 89
---------	----------	---------

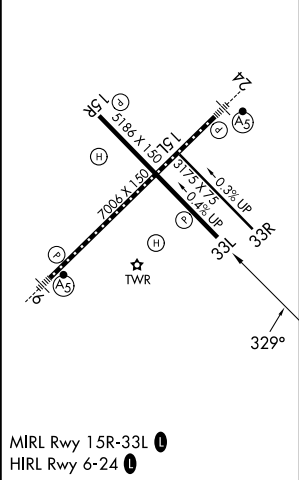

600	2000	CCC	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 50).			
			BJACK Holding Pattern			
*LNAV only.			GP 3.00° TCH 45			
			RW33L			
			JATEV 1500			
			1500			
			1.1 3.2 NM 6.1 NM			
			CATEGORY			
			A B C D			
			LPV DA			
			339-7/8 250 (300-7/8)			
			LNAV/VNAV DA			
			412-1 3/8 323 (400-1 3/8)			
			LNAV MDA			
			500-1 411 (500-1) 500-1 1/4 411 (500-1 1/4)			
			CIRCLING			
			600-1 501 (600-1) 660-1 561 (600-1) 660-1 1/2 561 (600-1 1/2) 960-2 3/4 861 (900-2 3/4)			