

WAAS

CH **72601**

W32A

APP CRS

319°

Rwy Ldg

6500

TDZE

937

Apt Elev

937

RNAV (GPS) RWY 32

DELAWARE COUNTY RGNL (MIE)

▼



▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Fort Wayne Intl altimeter setting. For inop MALSR when using Fort Wayne Intl altimeter setting, increase LPV all Cats visibility to 1½ mile. When local altimeter setting not received, use Fort Wayne Intl altimeter setting and increase DA 121 feet; increase LPV and LNAV/VNAV all Cats visibility by ½ mile; increase all MDA 140 feet and LNAV visibility Cats C and D to 1¼; increase Circling visibility Cats C and D by ¼ mile. For inop MALSR, increase all LPV Cats visibility to 1 SM.

MALSR

MISSED APPROACH:
Climb to 2800 direct JOGBA and hold.

ATIS 133.25	INDIANAPOLIS APP CON 120.65 317.8	MUNCIE TOWER★ 120.1 (CTAF) 0	GND CON 121.9	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

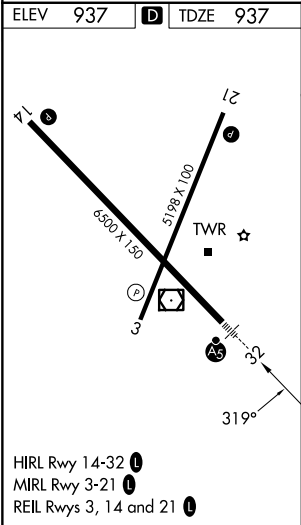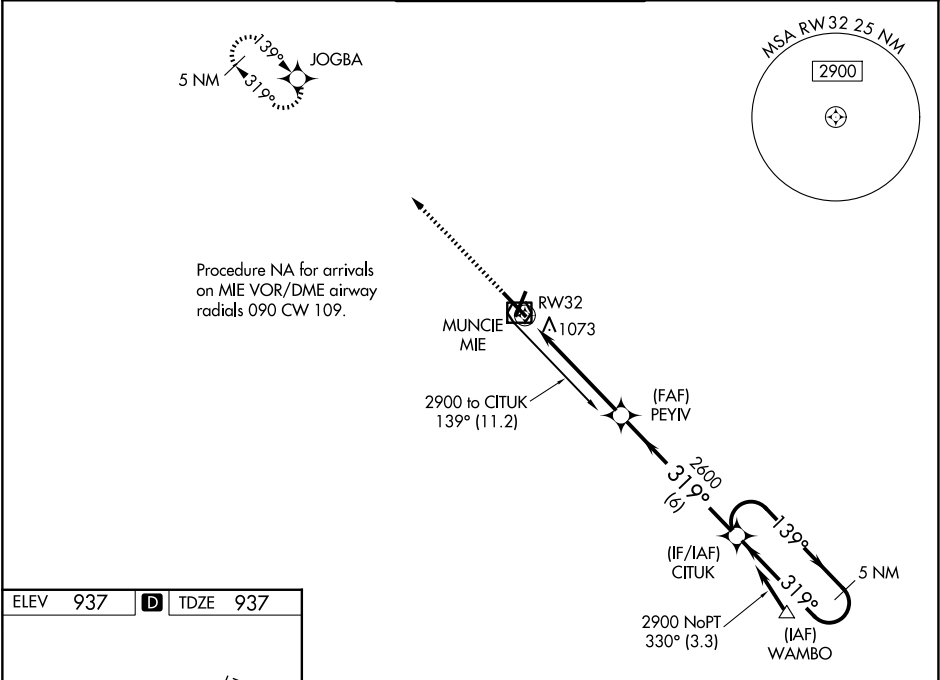

2800 ↑		JOGBA		5 NM Holding Pattern	
*LNAV only.		*1.2 NM to RW32		CITUK	
RW32		PEYIV 2600		139°→ ←319° 2900	
1.2		3.8 NM		6 NM	
		2600		GP 3.04° TCH 52	
CATEGORY	A		B	C	D
LPV DA	1241-½ 304 (400-½)				
LNAV/VNAV DA	1396-1⅛ 459 (500-1⅛)				
LNAV MDA	1460-½ 523 (600-½)			1460-1 523 (600-1)	
CIRCLING	1460-1 523 (600-1)			1480-1½ 543 (600-1½)	1560-2 623 (700-2)

EC-2, 27 NOV 2025 to 25 DEC 2025

EC-2, 27 NOV 2025 to 25 DEC 2025