

LOC I-ESF 111.5 Chan 52	APP CRS 270°	Rwy Idg 5998 TDZE 92 Apt Elev 112
---	------------------------	--

ILS or LOC/DME RWY 27
ESLER RGNL (ESF)

RADAR or DME required.


T Circling Rwy 14, 32 NA at night. VDP NA with Alexandria Intl altimeter setting. When local altimeter not received, use Alexandria Intl altimeter setting and increase DA to 327 feet; increase all MDA to 40 feet and Circling visibility Cat D ¼ SM. For inop MALSR, increase S-LOC 27 Cat C/D visibility to 1 SM.

MALSR



MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 on heading 120° and on AEX VORTAC R-067 to LARTO/AEX 24.1 DME/RADAR and hold.

ESF ASOS 119.425	POLK APP CON 125.4 254.8	UNICOM 122.8 (CTAF) 0
----------------------------	------------------------------------	--

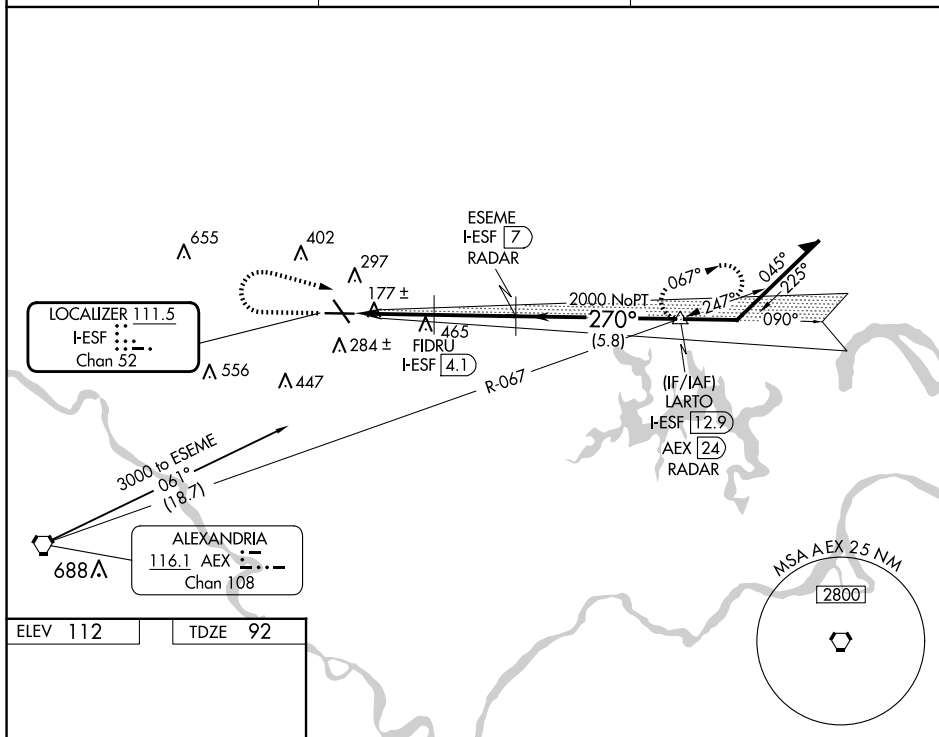

CATEGORY	A	B	C	D
S-ILS 27	292-1/2 200 (200-1/2)			
S-LOC 27	440-1/2	348 (400-1/2)	440-5/8	348 (400-5/8)
CIRCLING	600-1	488 (500-1)	740-13/4 628 (700-13/4)	760-2 648 (700-2)