

WAAS CH 61103 W27A	APP CRS 270°	Rwy Idg 5998 TDZE 92 Apt Elev 112
--	------------------------	--

RNAV (GPS) RWY 27
ESLR RGNL (ESF)

RNP APCH-GPS.

⚠ Circling Rwy 14, 32 NA at night. Baro-VNAV and VDP NA when using Alexandria Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C or above 54°C. When local altimeter setting not received, use Alexandria Intl altimeter setting; increase LPV DA to 327 feet; increase LNAV/VNAV DA to 457 feet and all visibility ½ SM; increase all MDAs 40 feet and LNAV visibility Cat C/D ½ SM and Circling visibility Cat D ¼ SM. For inop MALSR increase LNAV/VNAV all Cats visibility to 1 mile and LNAV Cat C/D visibility to 1½. For inop MALSR, when using Alexandria Intl altimeter setting, increase LNAV/VNAV all Cats visibility to 1 SM.


MALSR




MISSED APPROACH:
Climb to 3000 direct
HOVUS and on track
214° to AEX VORTAC
and hold.

ESF ASOS
119.425

POLK APP CON
125.4 254.8

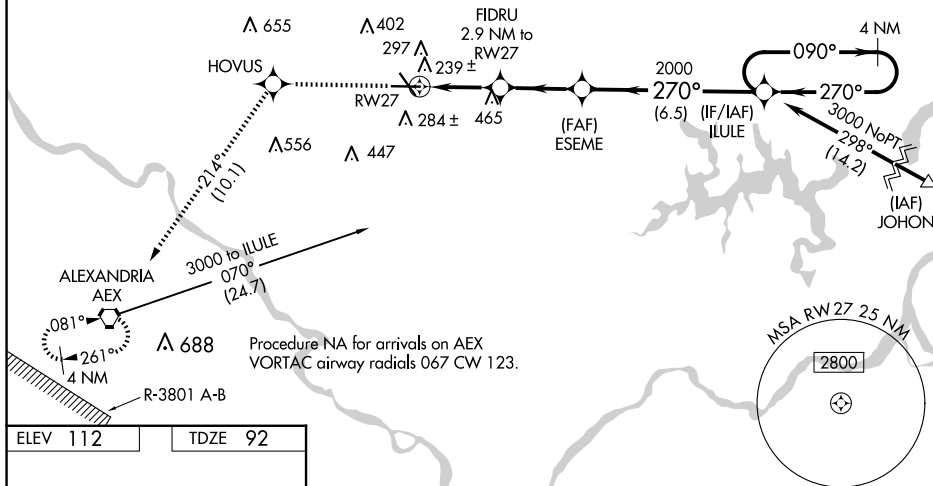UNICOM
122.8 (CTAF) 

ELEV 112		TDZE 92
----------	--	---------



3000 ↑	HOVUS ✦	tr 214°	AEX ◻				
LNAV only.				ILULU 4 NM Holding Pattern ESEME 2000 FIDRU 2.9 NM to RW27 RW27 1060 2000 GP 3.00° TCH 59°			
CATEGORY	A		B		C		D
LPV DA			292-1/2		200 (200-1/2)		
LNAV/VNAV DA			422-1/2		330 (400-1/2)		
LNAV MDA	500-1/2	408 (400-1/2)			500-3/4	408 (400-3/4)	
CIRCLING	600-1	488 (500-1)	740-13/4 628 (700-13/4)		760-2 648 (700-2)		

REIL Rwy 9, 14 and 32 **L**
MIRL Rwy 14-32 **L**
HIRL Rwy 9-27 **L**

ALEXANDRIA, LOUISIANA

Amdt 2B 15JUL21

31°24'N-92°18'W

ESLER RGNL (ESF)

RNAV (GPS) RWY 27