


WAAS CH 82501 W17A	APP CRS 168°	Rwy Idg 8002 TDZE 24 Apt Elev 24
--	------------------------	---

RNAV (GPS) RWY 17
ACADIANA RGNL (ARA)

RNP APCH.					ODALS	MISSED APPROACH: Climb to 480 then climbing left turn to 2000 direct CLYNT and hold.		
▼ Circling NA to Rwys 17W and 35W. Inop table does not apply to LPV. For inop ALS, increase LNAV/VNAV all Cats visibility to 1¼ SM and LNAV Cats C/D visibility to 1 SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C.								
ASOS	LAFAYETTE APP CON*	ACADIANA TOWER*	GND CON	CLNC DEL	CLNC DEL	UNICOM	122.7	
133.325	121.1 268.7	125.0 (CTAF) 0 239.3	121.7	121.7	118.05 (when twr closed)	122.95	122.7 0	

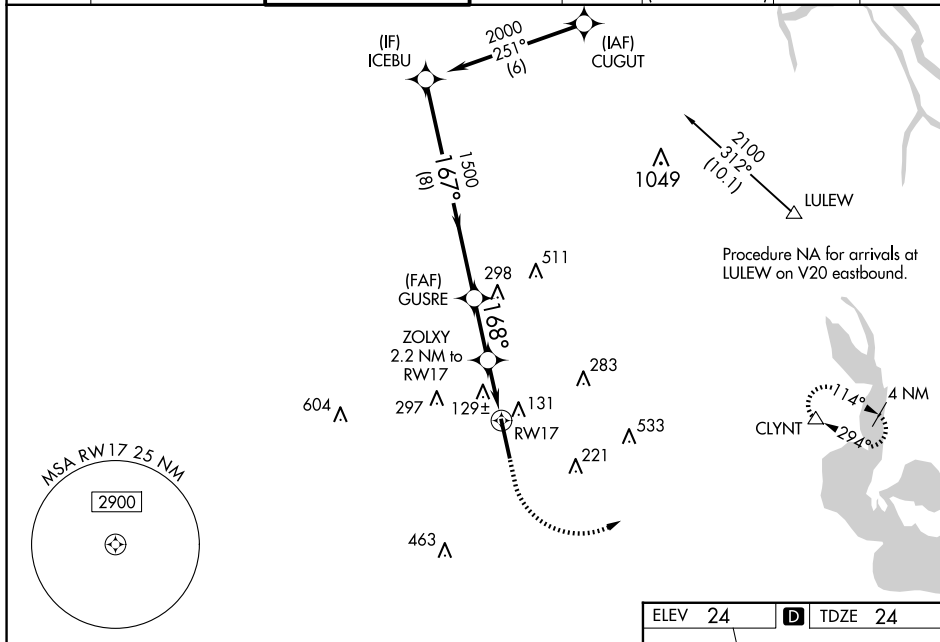

The diagram illustrates the approach paths for HIRL Rwy 17-35 and Seaway Rwy 17W-35W. Key features include:

- HIRL Rwy 17-35:** A solid black line representing the runway axis, oriented at 168°. It includes distance markers of 8 NM, 2.3 NM, 1.2 NM, and 1 NM.
- Seaway Rwy 17W-35W:** A dashed grey line representing the runway axis, also oriented at 168°.
- Navigation Aids:**
 - VGSI and RNAV glidepath:** Indicated by a dashed line from GUSRE to ZOLXY, with a note "(VGSI Angle 3.00/TCH 51)".
 - GP 3.00° TCH 51:** A glide path starting from ICEBU.
 - LNAV only:** A curved arrow indicating a lateral navigation path from ZOLXY to RW17.
- Distances and Altitudes:**
 - ICEBU to start of HIRL: 2000 feet.
 - GUSRE altitude: 1500 feet.
 - ZOLXY altitude: 2.2 NM to RW17.
 - RW17 altitude: *1 NM to RW17.
 - CLYNT altitude: 480 feet.
 - Seaway Rwy 17W-35W distances: 800' x 200' and 500' x 150'.
- Other Markings:**
 - A "CIRCLING" symbol (a circle with a dot) is shown near the bottom left.
 - A "TWR 105" tower location is marked with a star and the number 103.
 - A "35W" heading marker is shown near the bottom right.