


VORTAC LFT	APP CRS	Rwy Idg	8002
109.8	145°	TDZE	24
Chan 35		Apt Elev	24

VOR or TACAN RWY 17
ACADIANA RGNL (A.R.A.)

▼ Circling NA to Rwy 17W and 35W. ▲ DME or RADAR required. For inop ALS, increase S-17 Cat E visibility to 1½ mile.		ODALS 	MISSED APPROACH: Climbing left turn to 2000 on heading 060° and LFT VORTAC R-114 to CLYNT INT/18.8 DME and hold.		
ASOS	LAFAYETTE APP CON★	ACADIANA TOWER★	GND CON	CLNC DEL	CLNC DEL
133.325	121.1 268.7	125.0 (CTAF) 0 239.3	121.7	121.7	118.05 (when twr closed)
					UNICOM 122.95
					122.7 0

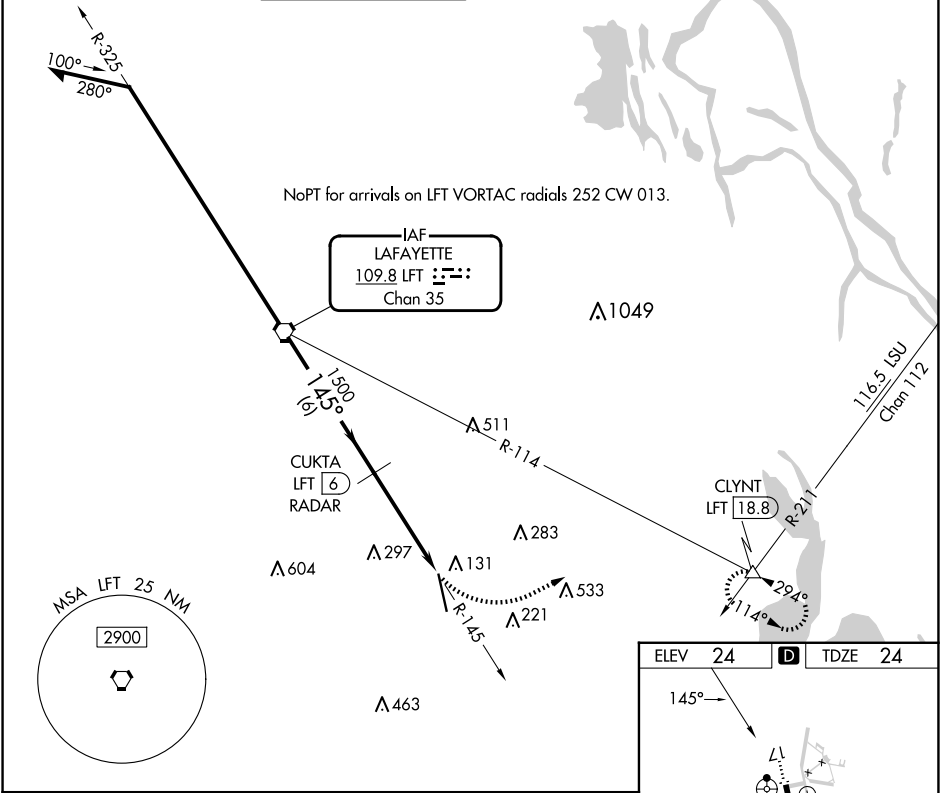

Remain within 15 NM		LFT VORTAC		2000	LFT	CLYNT
3000		3000		hdg 060°	R-114	△
325°		145°		CUKTA LFT (6) RADAR		
145°		145°		LFT 9		
1500		1500		LFT 10.3		
3.12°		TCH 51				
6 NM		3 NM		1.3		
CATEGORY	A	B	C	D	E	
S-17	500-¾	476 (500-¾)	500-1¼	476 (500-1¼)		
CIRCLING	500-1	476 (500-1)	600-1½	680-2	900-3	
			576 (600-1½)	656 (700-2)	876 (900-3)	

