


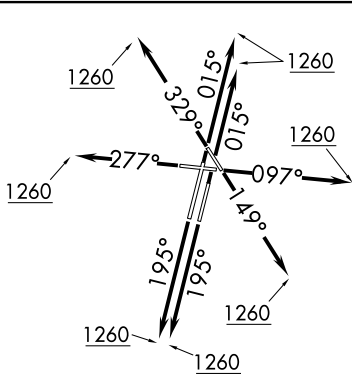

RNAV 1 - DME/DME/IRU or GPS.

RADAR required. RADAR required for non-GPS equipped aircraft.

CHICAGO DEP CON

133.5 349.0

ATIS |

132.075

GND CON |

121.8

DUPAGE TOWER

120.9 257.8

TOP ALTITUDE:
3000


TAKEOFF MINIMUMS:

Rwys 2L/R, 10, 20L/R, 28, 33: Standard.

Rwy 15: 300-1 or standard with minimum climb of 205' per NM to 1000.

NOTE: Turbojet departures maintain 250K until advised by ATC.

NOTE: AKMIE Transition: For aircraft inbound to BMI, SPI, PIA, or as assigned by ATC.

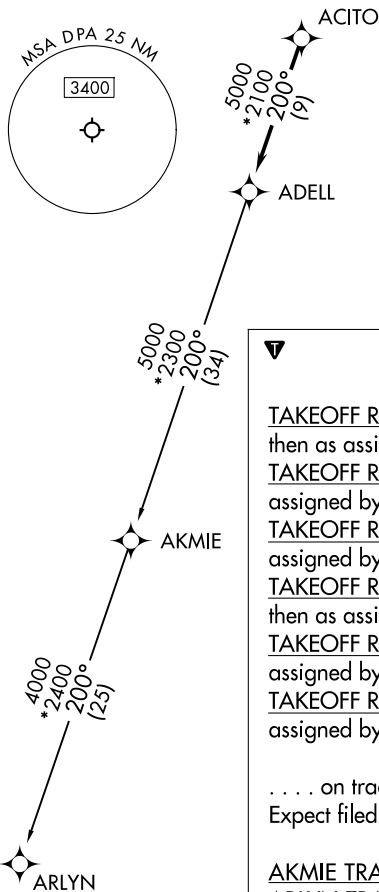

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 2L/R: Climb on heading 015° to 1260, then as assigned by ATC, for vectors to ACITO, thence . . .

TAKEOFF RUNWAY 10: Climb on heading 097° to 1260, then as assigned by ATC, for vectors to ACITO, thence

TAKEOFF RUNWAY 15: Climb on heading 149° to 1260, then as assigned by ATC, for vectors to ACITO, thence

TAKEOFF RUNWAYS 20L/R: Climb on heading 195° to 1260, then as assigned by ATC. for vectors to ACITO. thence . . .

TAKEOFF RUNWAY 28: Climb on heading 277° to 1260, then as assigned by ATC. for vectors to ACITO. thence

TAKEOFF RUNWAY 33: Climb on heading 329° to 1260, then as assigned by ATC, for vectors to ACITO, thence . . .

... on track 200° to ADELL, then on (transition). Maintain 3000.
Expect filed altitude 10 minutes after departure.

AKMIE TRANSITION (ADELL7.AKMIE):

ARLYN TRANSITION (ADELL7.ARLYN):

NOTE: Chart not to scale.