

VOR/DME SWO 108.4 Chan 21	APP CRS 178°	Rwy Idg 7401 TDZE 1000 Apt Elev 1000	VOR RWY 17 STILLWATER RGNL (SWO)
---	------------------------	---	-------------------------------------




⚠

When local alimeter setting not received, use Ponca City Rgnl altimeter setting and increase all MDA 80 feet and Circling Cat D visibility ½ mile. VDP NA with Ponca City altimeter setting. For inop MALSR increase S-17 Cats A/B visibility to 1 mile. Helicopter visibility reduction below ¾ SM NA.

MALSR

MISSED APPROACH:
Climbing right turn to 2600
direct SWO VOR/DME
and hold.

ASOS 135.725	KANSAS CITY CENTER 127.8 319.1	STILLWATER TOWER ★ 125.35 (CTAF) 0	GND CON 121.6	UNICOM 122.95
------------------------	--	--	-------------------------	-------------------------

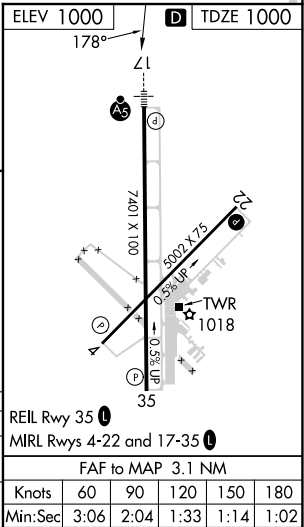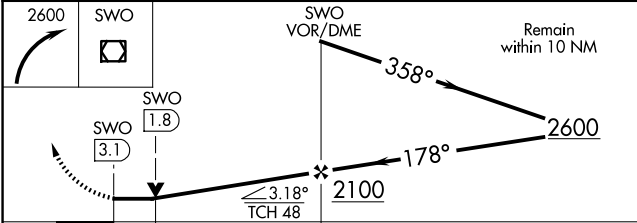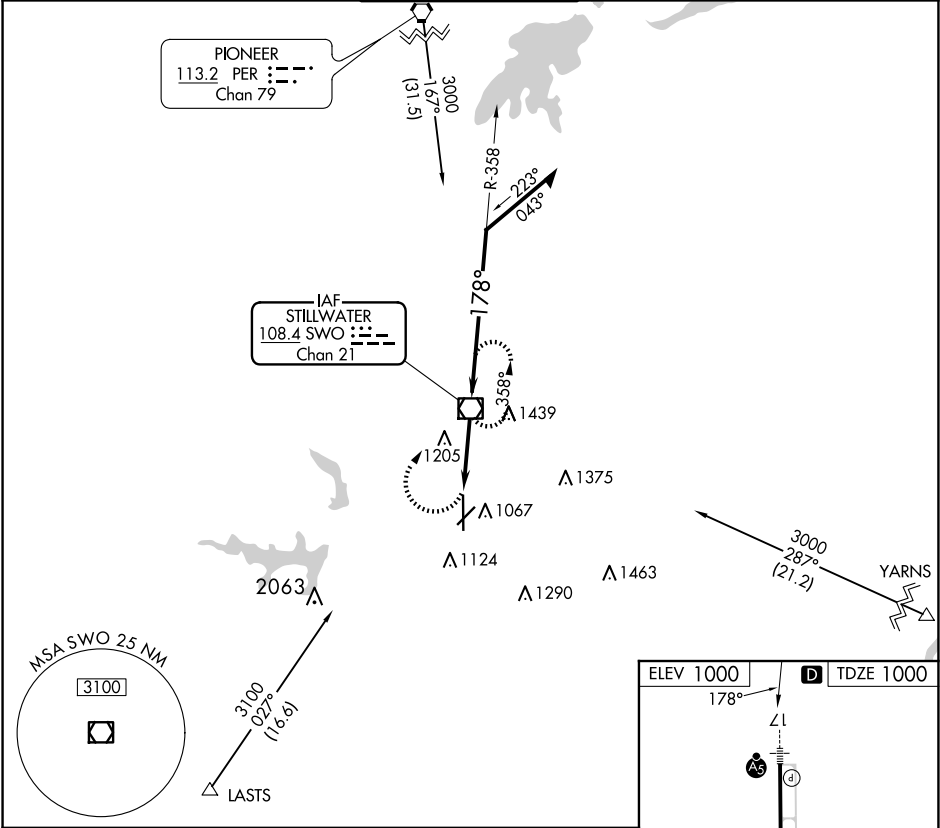

	1.3	1.8 NM				35	
CATEGORY	A		B		C	D	
S-17	1460-¾		460 (500-¾)		1460-1 460 (500-1)		
CIRCLING	1460-1		460 (500-1)		1740-2¼ 740 (800-2¼)		
			1520-1½ 520 (600-1½)				
				REIL Rwy 35 0		MIRL Rwys 4-22 and 17-35 0	
				FAF to MAP		3.1 NM	
				Knots	60	90	120 150 180
				Min:Sec	3:06	2:04	1:33 1:14 1:02

SC-1, 27 NOV 2025 to 25 DEC 2025

SC-1, 27 NOV 2025 to 25 DEC 2025