


|                                               |                        |                                                                |
|-----------------------------------------------|------------------------|----------------------------------------------------------------|
| VOR/DME SWO<br><b>108.4</b><br>Chan <b>21</b> | APP CRS<br><b>356°</b> | Rwy Idg <b>7401</b><br>TDZE <b>966</b><br>Apt Elev <b>1000</b> |
|-----------------------------------------------|------------------------|----------------------------------------------------------------|

VOR/DME RWY 35  
STILLWATER RGNL (SWO)



**T** When local altimeter setting not received, use Ponca City Rgnl altimeter setting  
**A** and increase all MDA 80 feet; S-35 Cats C/D visibility  $\frac{1}{4}$  mile; Circling Cat D  
visibility  $\frac{1}{2}$  mile. VDP NA with Ponca City altimeter setting.

**MISSED APPROACH:** Climb to 2600 direct SWO VOR/DME and hold.

|                 |                                   |                                       |                  |                  |
|-----------------|-----------------------------------|---------------------------------------|------------------|------------------|
| ASOS<br>135.725 | KANSAS CITY CENTER<br>127.8 319.1 | STILLWATER TOWER ★<br>125.35 (CTAF) 0 | GND CON<br>121.6 | UNICOM<br>122.95 |
|-----------------|-----------------------------------|---------------------------------------|------------------|------------------|

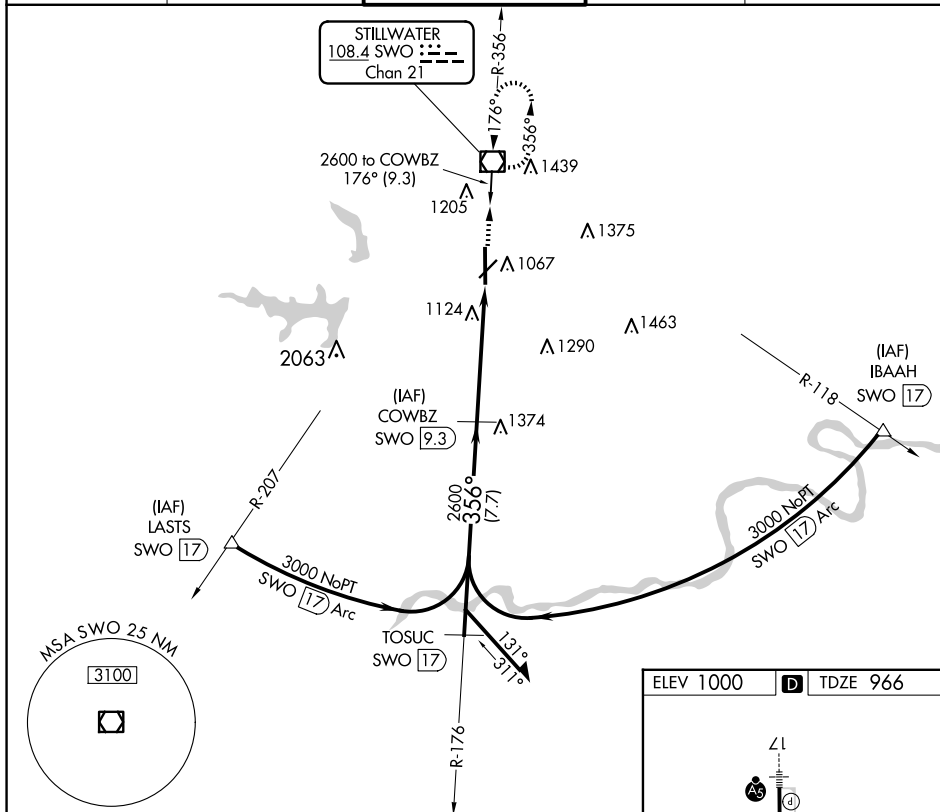

SC-1, 27 NOV 2025 to 25 DEC 2025

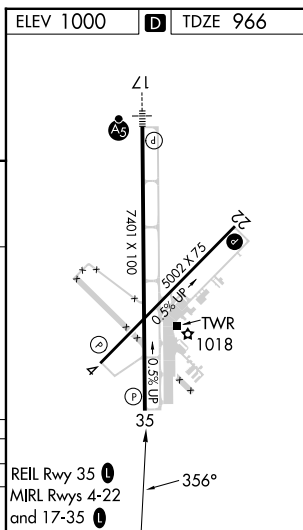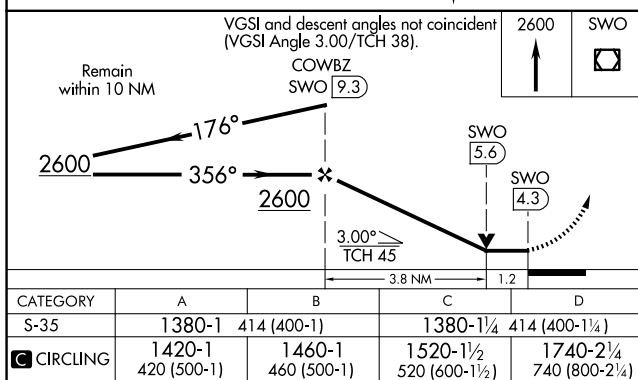

STILLWATER, OKLAHOMA  
Amdt 1B 21AUG14

36°10'N-97°05'W

STILLWATER RGNL (SWO)  
VOR/DME RWY 35