

WAAS
CH **58104**
W09A

APP CRS
084°

Rwy Ldg
TDZE **845**
Apt Elev **845**

RNAV (GPS) RWY 9L

GRAND FORKS INTL (GFK)

RNP APCH - GPS.


▼

Baro-VNAV and VDP NA when using CKN altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. When local altimeter setting not received, use CKN altimeter setting and increase LPV DA to 1106 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 1156 feet and all visibilities ½ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH:

Climb to 2800 direct URBAH and hold.

ATIS 119.4	GRAND FORKS APP CON ★ 118.1 318.1	GRAND FORKS TOWER ★ 118.4(CTAF) 350.35	GND CON 124.575	CLNC DEL 135.725	UNICOM 122.95
----------------------	---	--	---------------------------	----------------------------	-------------------------

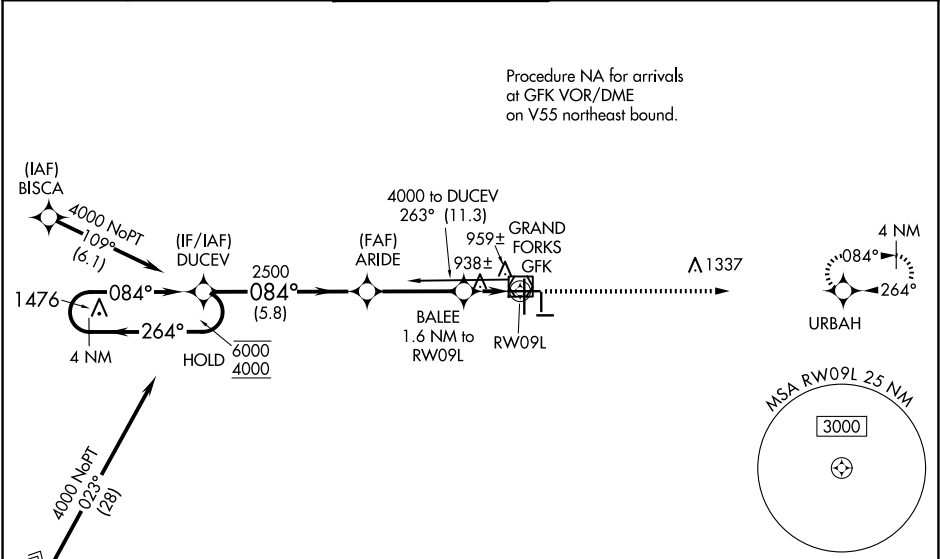

ELEV 845

D

TDZE 845

4 NM Holding Pattern

DUCEV

ARIDE

BALEE 1.6 NM to RW09L

URBAH

6000 ← 264°

4000 ← 084°

GP 3.00° TCH 45

2500

1400

5.8 NM

3.5 NM

0.6

1 NM

CATEGORY	A	B	C	D
LPV DA		1045-¾	200 (200-¾)	
LNAV/VNAV DA		1095-¾	250 (300-¾)	
LNAV MDA		1200-1	355 (400-1)	
C CIRCLING	1260-1 415 (500-1)	1300-1 455 (500-1)	1400-1½ 555 (600-1½)	1420-2 575 (600-2)

7351 X 150

35L

7351 X 100

27R

7351 X 100

27L

3300 X 60

35R

7351 X 100

27R

7351 X 100

27L

7351 X 100

27R

7351 X 100

27L

MIRL Rwy 9L-27R, 9R-27L and 17L-35R

HIRL Rwy 17R-35L

REIL Rwy 17R, 9L, and 27R