

LOC/DME I-AIK	APP CRS	Rwy Ldg	5500
109.9	066°	TDZE	515
Chan 36		Apt Elev	529

ILS or LOC/DME RWY 7

AIKEN RGNL (AIK)


V

NA

VDP NA with Augusta Rgnl at Bush Fld altimeter setting. When local altimeter setting not received, use Augusta Rgnl at Bush Fld altimeter setting: increase S-ILS 7 all Cats DAs to 819 feet and all Cats visibility ¼ SM; increase all MDAs 120 feet and S-LOC 7 Cats C/D visibility ¾ SM and Circling Cat C visibility ¼ SM. Circling Rwy 1, 19 NA at night.

MISSED APPROACH: Climb to 1100 then climbing right turn to 3000 on heading 276° and I-AIK SW course (246°) to VIXLY INT/I-AIK 12.7 DME and hold.

AWOS-3PT 118.025	AUGUSTA APP CON★ 119.15 284.625	UNICOM 122.8 (CTAF) 0
---------------------	------------------------------------	--------------------------

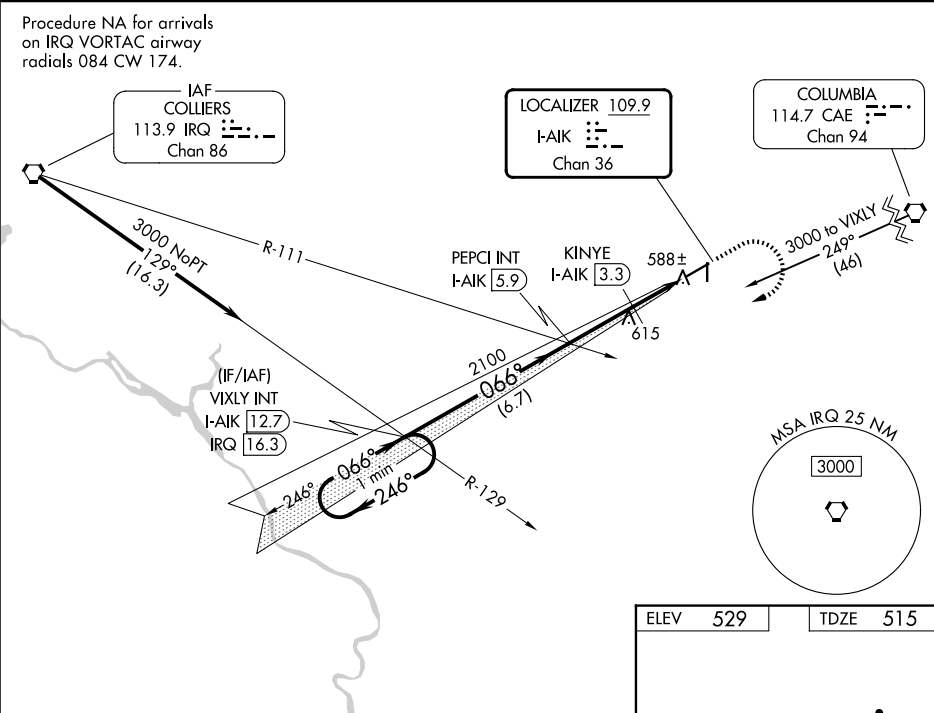

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 41).

One Minute Holding Pattern

VIXLY INT I-AIK 12.7

PEPCI INT I-AIK 5.9

3000 hdg 276°

Min Alt 1160 when using Augusta Rgnl at Bush Field altimeter setting.

KINYE I-AIK 3.3

* I-AIK 2.1

* LOC only.

I-AIK 1.1

2100

246° 066°

GS 3.00° TCH 45

6.7 NM 2.6 NM 1.3 NM 1.0

CATEGORY	A	B	C	D
S-ILS 7		715-¾	200 (200-¾)	
S-LOC 7		880-1	365 (400-1)	
CIRCLING	980-1 451 (500-1)	1000-1 471 (500-1)	1140-1¾ 611 (700-1¾)	1420-3 891 (900-3)

REIL Rwy 25

MIRL Rwy 7-25 0