


WAAS CH 61300 W30A	APP CRS 296°	Rwy Idg TDZE 619 Apt Elev 632	5500
--	------------------------	---	-------------

RNAV (GPS) RWY 30


BUTLER COUNTY RGNL/HOGAN FLD (HAO)

RNP APCH - GPS.			MALS	MISSED APPROACH: Climb to 2700 direct MONTR and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. Inop table does not apply to LPV.				

ASOS 121.425	CINCINNATI APP CON 121.0 254.25	CLNC DEL 126.25	UNICOM 123.05 (CTAF) 0
------------------------	---	---------------------------	----------------------------------

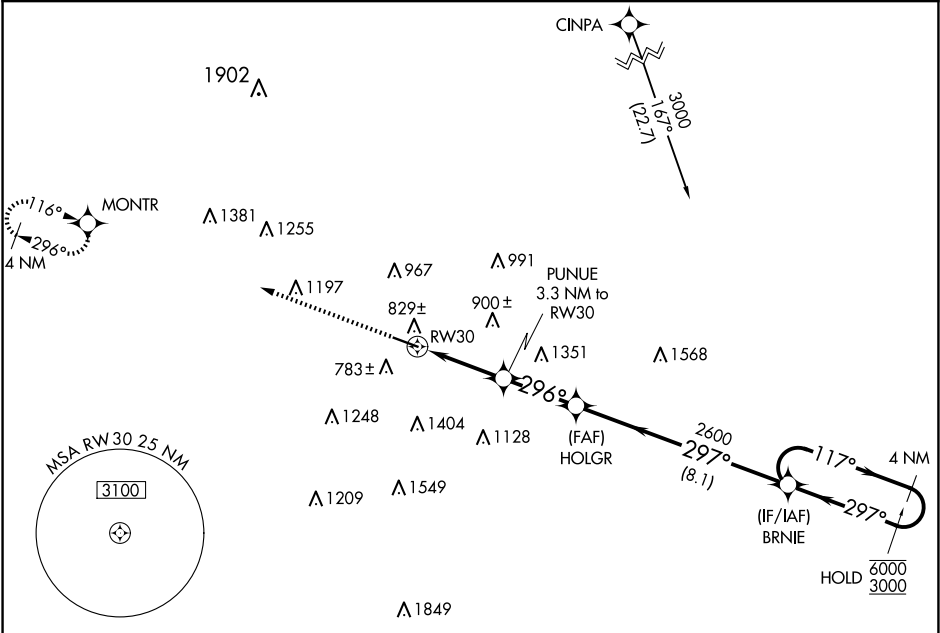

ELEV 632	TDZE 619
-----------------	-----------------

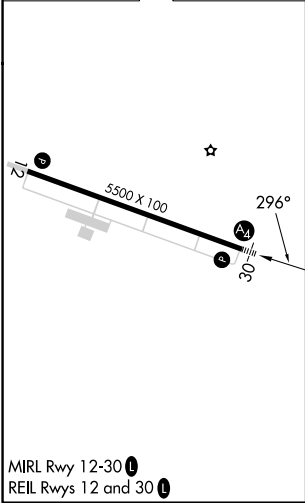

2700 MONTR		4 NM Holding Pattern		
PUNUE 3.3 NM to RW30		HOLGR 2600		
1.3 NM to RW30		BRNIE 117° 6000 3000		
RW30 296°		297° 2600		
1700		GP 3.00° TCH 46		
1.3		2.8 NM		
2 NM		8.1 NM		
CATEGORY	A	B	C	D
LPV DA	819-3/4		200 (200-3/4)	
LNAV/VNAV DA	1080-1 1/8		461 (500-1 1/8)	
LNAV MDA	1080-3/4 461 (500-3/4)		1080-1 1/8 461 (500-1 1/8)	
CIRCLING	1280-1 648 (700-1)		1300-1 3/4 668 (700-1 3/4) 1760-3 1128 (1200-3)	

EC-2, 27 NOV 2025 to 25 DEC 2025

EC-2, 27 NOV 2025 to 25 DEC 2025