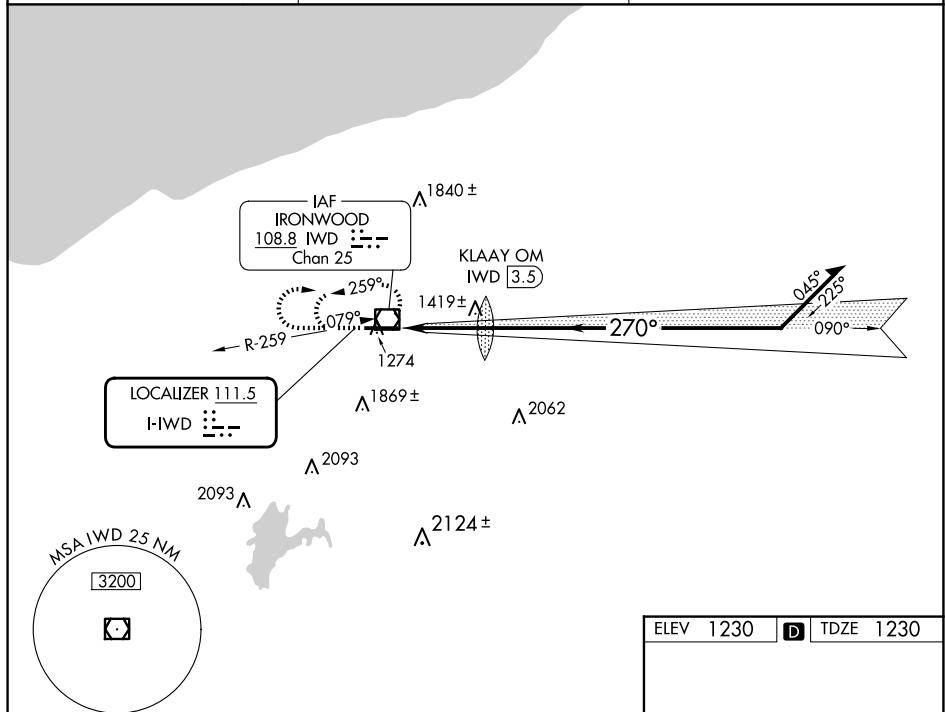


LOC I-IWD <u>111.5</u>	APP CRS 270°	Rwy Ldg 6501 TDZE 1230 Apt Elev 1230
----------------------------------	------------------------	---

ILS or LOC RWY 27
GOGEBIC/IRON COUNTY (IWD)

 NA  -26°C	When local altimeter setting not received, use ASX altimeter setting: increase DA to 1562 feet; increase all MDAs 140 feet and S-LOC 27 visibility Cats C and D ½ SM and Circling visibility Cat B ¼ SM. For inop ALS when using ASX altimeter setting, increase S-ILS 27 all Cats visibility to 1 SM.	MALSR 	MISSED APPROACH: Climb to 3300 then right turn direct IWD VOR/DME and hold.
---	--	--	--

AWOS-3PT 125.175	MINNEAPOLIS CENTER 133.55	UNICOM 122.8 (CTAF) 0
----------------------------	-------------------------------------	---------------------------------

[illegible]

	A		B		C		D	
S-ILS 27	1430-½				200 (200-½)			
S-LOC 27	1720-½		490 (500-½)		1720-1		490 (500-1)	
CIRCLING	2100-1¼		870 (900-1¼)		2200-3 970 (1000-3)		2220-3 990 (1000-3)	

ELEV	1230	D	TDZE	1230
REIL Rwy 9 L HIRL Rwy 9-27 L				
FAF to NM				
Knots	60	90	120	150
Min:Sec	3:12	2:08	1:36	1:04