

APP CRS
107°


Rwy Ldg
TDZE
413

Apt Elev
413

RNAV (GPS) RWY 12R

ST LOUIS DOWNTOWN (CPS)

RNP APCH - GPS				MISSED APPROACH: Climb to 2200 direct JIXAB and right turn on 125° track to LICKO and hold.		
When local altimeter setting not received, use St Louis Lambert Intl altimeter setting and increase all MDAs 80 feet; increase RNAV Cats B/C/D and Circling Cat C visibility ¼ SM. Circling Rwy 5 NA at night. Rwy 12R helicopter visibility reduction below ¼ SM NA.						
ATIS 121.45	ST LOUIS APP CON 123.7 371.875	DOWNTOWN TOWER ★ 119.925 (CTAF) 0 379.3	GND CON 121.8	CLNC DEL 118.275	CLNC DEL 121.8 (When twr closed)	UNICOM 122.95

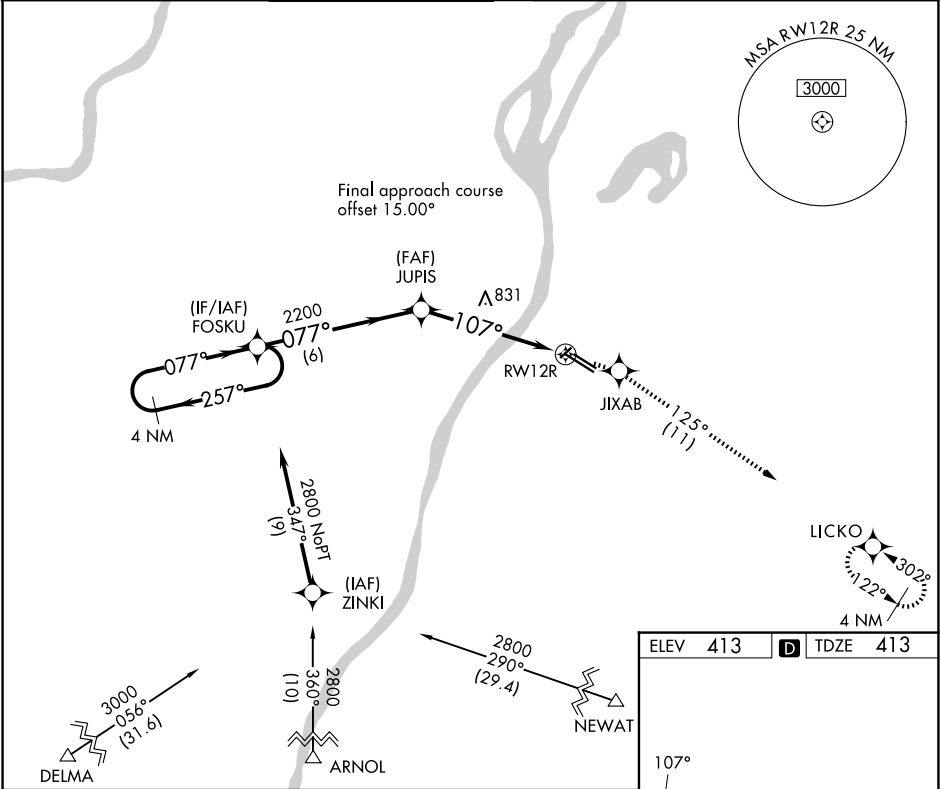

4 NM Holding Pattern FOSKU		2200	JIXAB	LICKO
2800 ← 257° 077° →		JUPIS	tr 125°	
VDP NA when using St Louis Lambert Intl altimeter setting.		2200	2.1 NM to RW12R	
6 NM		3.03° TCH 50	3.3 NM	2.1 NM
CATEGORY	A	B	C	D
RNAV MDA	1140-1 727 (800-1)	1140-2 727 (800-2)	1140-2¼ 727 (800-2¼)	
CIRCLING	1140-1 727 (800-1)	1240-2½ 827 (900-2½)	1380-3 967 (1000-3)	

ELEV 413 D TDZE 413

107°

2789 175 15 5301 X 75 7002 X 150 300 100

TWR

HIRL Rwy 12R-30L
REIL Rwys 12L and 12R
REIL Rwy 30R
MIRL Rwys 5-23 and 12L-30R