


**TOP ALTITUDE:**  
**3000**

ATIS  
132.4  
GND CON  
121.65  
WAUKEGAN TOWER★  
120.05 273.55  
DEP CON  
120.55

**TAKEOFF MINIMUMS**

Rwys 5, 32: Standard with minimum climb of 500' per NM to 1240.  
Rwys 14, 23: Standard with minimum climb of 500' per NM to 1230.

- NOTE: RNAV 1.  
NOTE: RADAR required.  
NOTE: DME/DME/IRU or GPS required.  
NOTE: TURBOJET departures maintain 250K until advised by ATC.  
NOTE: EMMLY transition: For aircraft inbound to Indianapolis Terminal area, or as assigned by ATC.  
NOTE: ELANR transition: For aircraft inbound to Cincinnati Terminal area, or as assigned by ATC.

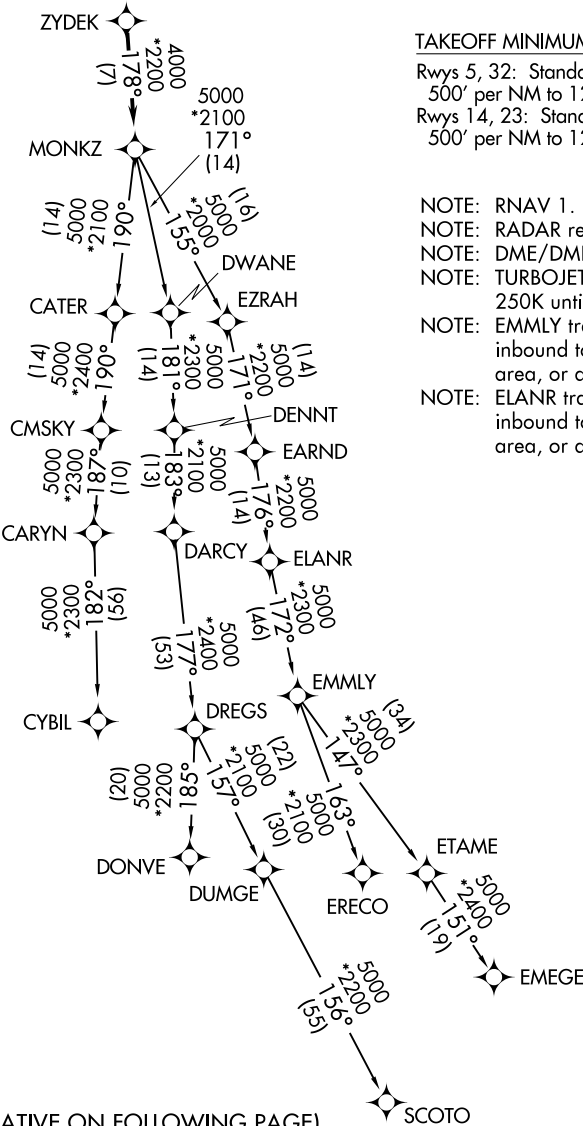

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.