

WAAS CH 65920 W13A	APP CRS 128°	Rwy Ldg TDZE 1182 Apt Elev 1183
--	------------------------	---

RNAV (GPS) RWY 13


FERGUS FALLS MUNI/EINAR MICKELSON FLD (FFM)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.
When local altimeter setting not received, use Elbow Lake altimeter setting and increase LPV DA to 1428 feet, increase LNAV/VNAV DA to 1516 feet and all visibilities ½ SM;
increase all MDAs 60 feet and LNAV Cat C/D and Circling Cat C/D visibility ½ SM.
Baro-VNAV and VDP NA when using Elbow Lake altimeter setting.

MISSED APPROACH:
Climb to 2900 direct
IGAKE and hold.

AWOS-3PT 119.05	MINNEAPOLIS CENTER 126.1 269.2	UNICOM 122.8 (CTAF) 0
---------------------------	--	---------------------------------

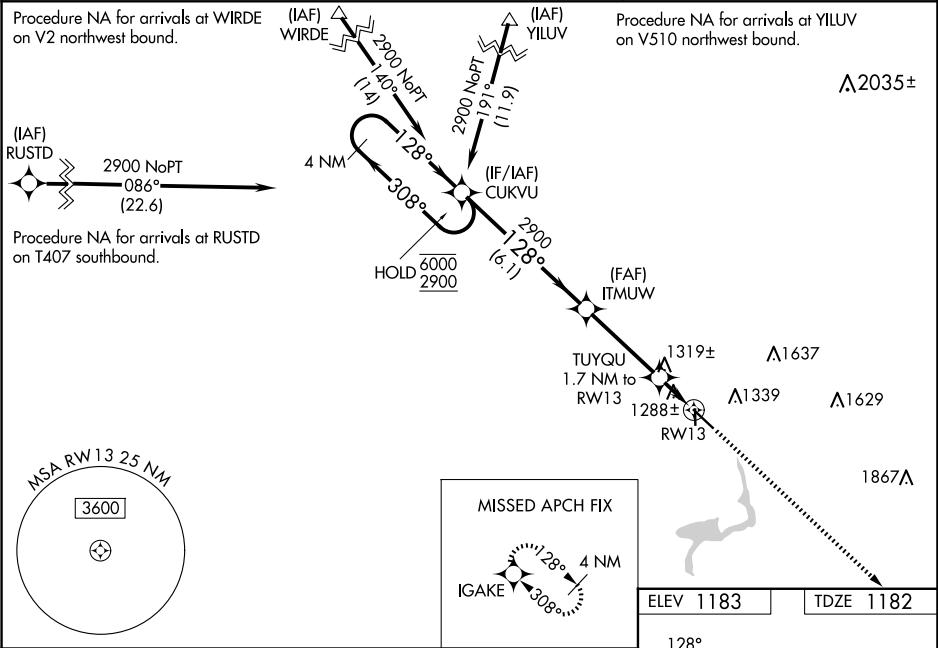

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 52).				
4 NM Holding Pattern CUKVU ITMUW 2900 TUYQU 1.7 NM to RW13 1.1 NM to RW13 RW13 6000 2900 308° 128° 128° 2900 GP 3.00° TCH 40 6.1 NM 3.6 NM 0.6 1.1 NM 1760 128° 13 3299 X 75 0.7% GP 35 3639 X 100				
CATEGORY	A	B	C	D
LPV DA	1382-¾ 200 (200-¾)			
LNAV/VNAV DA	1470-⅞ 288 (300-⅞)			
LNAV MDA	1580-1	398 (400-1)	1580-1⅛	398 (400-1⅛)
CIRCLING	1640-1 457 (500-1)	1740-1 557 (600-1)	1820-1¾ 637 (700-1¾)	1940-2½ 757 (800-2½)
REIL Rwy 13 and 35 0 MIRL Rwy 13-31 and 17-35 0				