

WAAS CH 72713 W27A	APP CRS 268°	Rwy Idg 5100 TDZE 925 Apt Elev 926
--	------------------------	---

RNAV (GPS) RWY 27
NORTHEAST OHIO RGNL (HZY)

T

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 2800 direct NOJWE and hold.

ASOS 118.325	BUFFALO APP CON ★ 121.0	UNICOM 122.8 (CTAF)	123.3 0
------------------------	-----------------------------------	-------------------------------	-----------------------

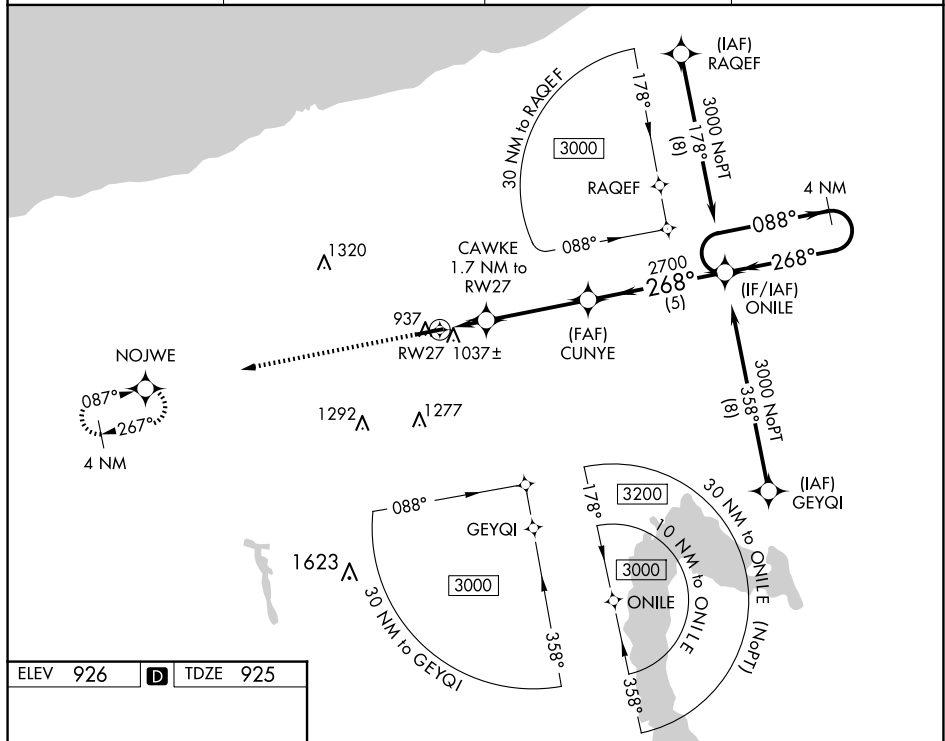


Diagram illustrating the RW27 approach procedure. The runway is 5900 x 100 with a 0.3% UP slope. The approach is a 268° descent. Key points include RW27, CAWKE (1.7 NM to RW27), CUNYE (2700), and ONILE (3000). The final approach segment is 088°. The diagram also shows the 4 NM Holding Pattern and the GP 3.00° TCH 45.

CATEGORY	A	B	C	D
LPV DA		1184- $\frac{7}{8}$	259 (300- $\frac{7}{8}$)	
LNAV/VNAV DA		1198- $\frac{7}{8}$	273 (300- $\frac{7}{8}$)	
LNAB MDA		1300-1	375 (400-1)	
CIRCLING	1340-1 414 (500-1)	1380-1 454 (500-1)	1500-1 $\frac{1}{2}$ 574 (600-1 $\frac{1}{2}$)	1580-2 654 (700-2)